

2N Helios

Telephone based door entry solution



- ★ Unique design
- ★ Communication over telecom base lines
- ★ Calling from entrance door to your office telephones
- ★ Door opening from standard or mobile telephone, by key code or proximity card
- ★ Modular system – possibility of upgrading basic modules by camera, display & access control, system

2N Helios is a door entry system which meets the highest demands and is of a modern design. This user-friendly door phone replaces door systems and offers many additional features.

2N Helios can be connected to any analog PBX extension available on the market. As a result of its modularity it enables the creation of customised solutions according to the user's needs, not only in terms of its size, but also with various control elements and functions. Each basic module can be equipped with a camera, display or card reader and an anti-vandal solution against damage. 2N Helios is made of high-quality stainless steel, and its flat design makes possible installation without cutting into the wall. The main advantages of 2N Helios door entry solution include easy installation, state of art functions and a modern design.



Button telephone:



Using the keypad you can dial any number. Tone and pulse dialling is available. It is possible to restrict authorisation for calls to the public telephone network at the PBX.

Code lock:



You can control the connected electric lock directly from the door. It is possible to define up to ten passwords with a length from 1 to 16 digits. The parameter of the period for which the switch is closed can also be set.

Card reader:



An installed card reader offers another resource for access to your building. Up to 750 proximity cards or key fobs are available. If you connect the reader module to your PC, you can check the entries and departures of the individual card holders. If the door is forced, you will receive an alarm announcement.

Additional switch:



This is an excellent resource for controlling a second appliance (one switch is integrated into every basic module). Closing and opening contacts are available. This switch also enables switching for an unlimited period or for the time of call duration. The additional switch can be used, for example, for switching on the light in the vestibule / corridor.

Video:



A connected video camera makes possible visual inspection of those entering the building. The picture can be sent either to your PC or the connected LCD display or TV set. At night a good picture is ensured by switching to the black and white mode and also infrared illumination.

Display:



The display provides you with the possibility of selecting the numbers using the telephone book. Up to one thousand items are available, and you can upload them from your PC via a USB interface. Company logos or other graphics can be allocated to the individual items. Display also gives you the opportunity to completely service the unit.


Voice programming menu:



For simple programming, a voice menu is implemented which navigates you through the setting of the individual parameters. It is possible to hear the current parameters settings and the scope of possible values which can be saved.



How does 2N Helios work?

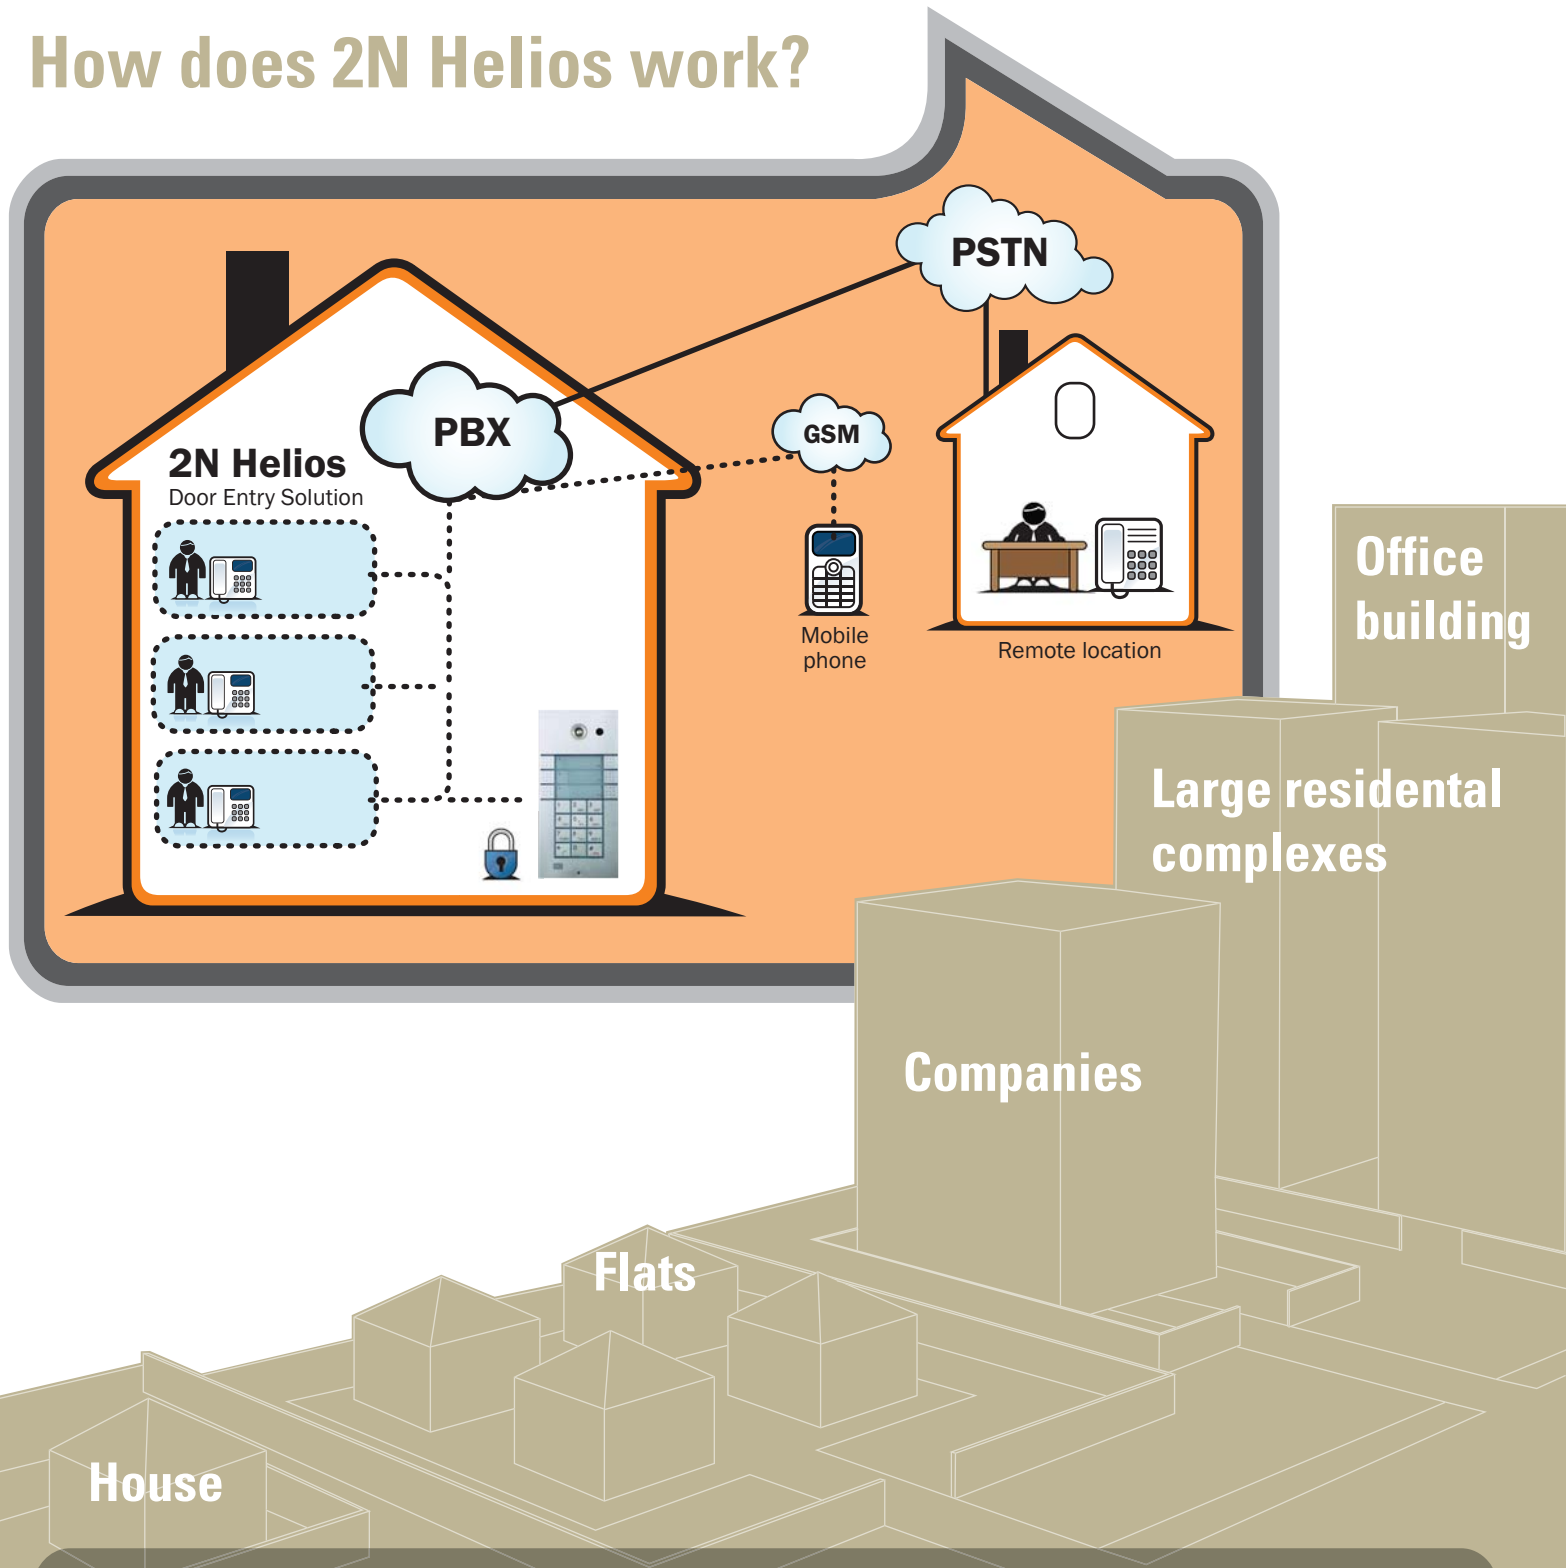


Who is 2N Helios Intended for?

- Residential houses & gated communities
- Public sector
- Schools & universities
- Hospitals & military bases
- Manufacturing facilities & distribution centres

HELIOS



1. Office building

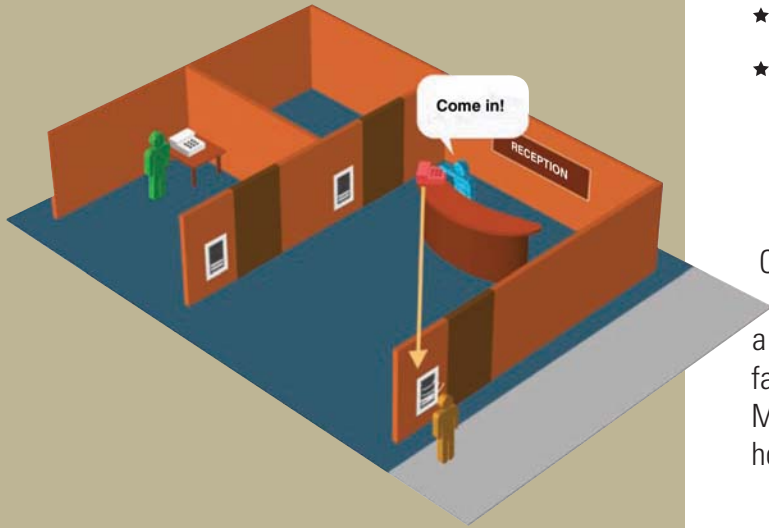

- ★ **Telephone based door entry solution**
- ★ **Remote door opening**
- ★ **Cost saving on wire installation**

Call from the entrance is transferred to the extension through internal telephone system. From the telephone can be entered a code for door opening for the visitor. Suitable solution to all facilities that are equipped with any kind of telephone system. Most desired solution for office buildings, government properties, hospitals, hotels and others.

2. Access control



- ★ **Quick door opening for authorized users**
- ★ **Numerical keypad also works as the code lock**
- ★ **Sophisticated access control solution by build in proximity card reader**

Want to monitor your visitors or tenants access? An entrance door or gate can be opened during the call by entering a code on the keypad of a standard telephone or mobile phone. As a resident by knowing the code for entering, you can type the code directly on the entrance panel for access. More sophisticated solution for access can be a proximity card or key fobs where reader is hidden inside of a 2N Helios entrance panel. You can link our proximity reader back to central software to provide you with more features and vital statistics.

3. Automation



- ★ **Wireless communication suitable for remote gates, entrances and help points**
- ★ **Available at any time through GSM network**
- ★ **Entrance opening from mobile phone**

After pressing the button, 2N Helios GSM solution allows you to wirelessly dial any mobile phone or a land line telephone in your premises and grant access to your visitor regardless of your location. This means there is no limit on distance and with the elimination of wires, gives you an easy installation.

Case studies

Basic modules



9135110E 1 button
9135130E 3 buttons
9135160E 6 buttons
9135110KE 1 button and keypad
9135130KE 3 buttons and keypad
9135160KE 6 buttons and keypad

100 x 210 x 29 mm

Extender modules



9135181E Extender 8 buttons
9135182E Extender 16 buttons
9135310E Infopanel without buttons

100 x 210 x 29 mm


Roofs, boxes



9135331E
Roof for 1 module
103 x 218 x 60 mm




9135332E
Roof for 2 modules
203 x 218 x 60 mm



9135351E
Flush fixed box for 1 module
125 x 235 x 46 mm
Hole: 110 x 220 x 50 mm




9135352E
Flush fixed box for 2 modules
225 x 235 x 46 mm
Hole: 210 x 220 x 50 mm



9135361E
Roof & box for masonry fitting - 1 module
129 x 240 x 41 mm
Hole: 110 x 220 x 50 mm



9135362E
Roof & box for masonry fitting - 2 modules
229 x 240 x 41 mm
Hole: 210 x 220 x 50 mm

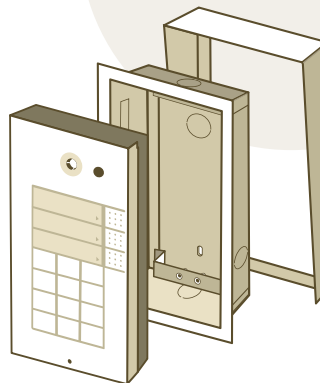

Vandal resistant masks, boxes




9135511E
Vandal resistant mask and box for masonry fitting
Mask: 138,5 x 241 mm
Hole: 110 x 220 x 50 mm



9135511KE
Vandal resistant mask with keypad and box for masonry fitting
Mask: 138,5 x 241 mm
Hole: 110 x 220 x 50 mm



9135515E
Vandal resistant mask for extender and box for masonry fitting
Mask: 138,5 x 241 mm
Hole: 110 x 220 x 50 mm

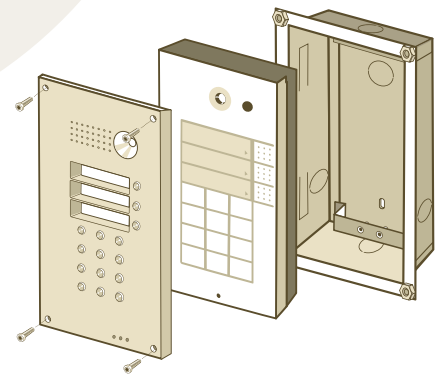

Additional modules



9135210E
Video camera



9135250E
Additional switch



9135240E
Display


Accessories



9135301E
Name plate



9135302E
Doublebutton name plate



9135311E
Infopanel name plate

Complimentary products



9134145E
Video server MPEG4/LAN




9134147E
LCD display 7



91341481E
12V/2A stabilised power supply

2N Helios modular system

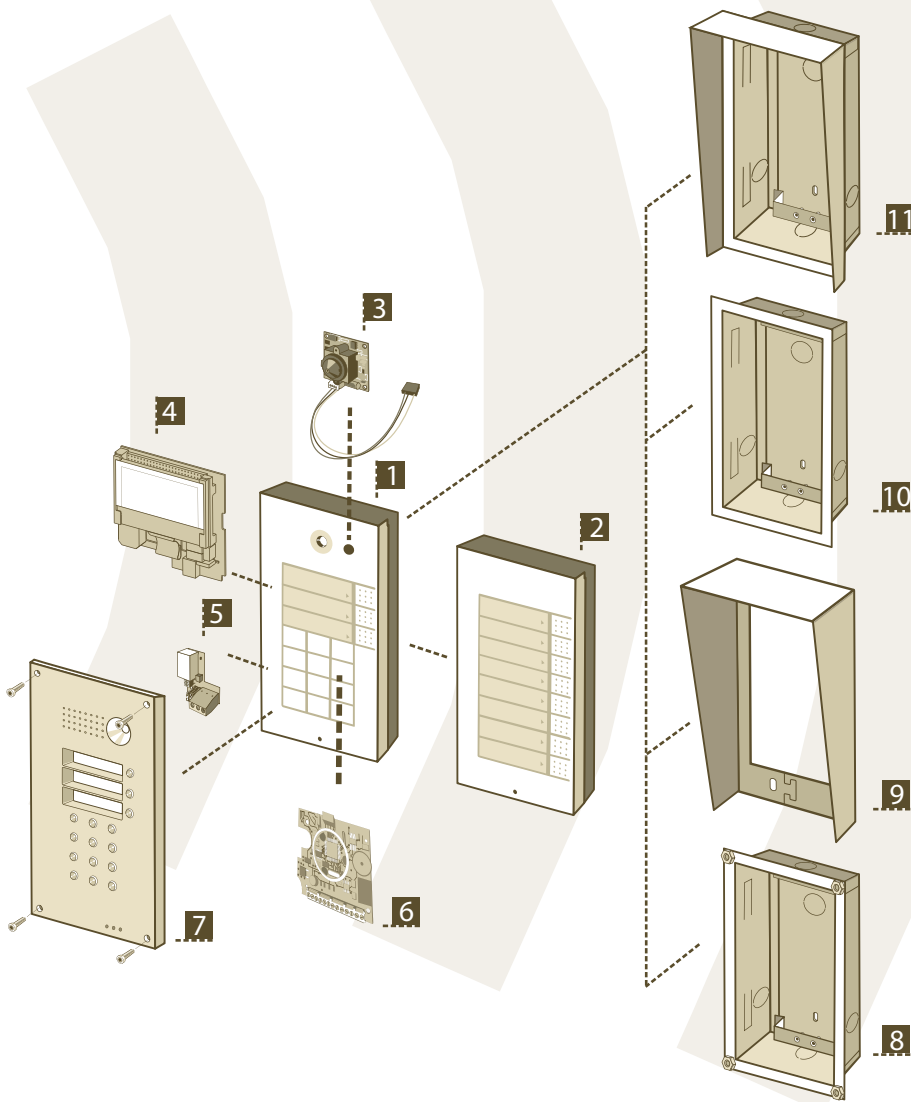

1. Basic module
 - 1 button
 - 3 buttons
 - 6 buttons
 - 1 button and keypad
 - 3 buttons and keypad
 - 6 buttons and keypad
2. Extender
 - 8 buttons
 - 16 buttons
 - infopanel without buttons
3. Video camera
4. Display
5. Additional switch
6. Card reader
- 7., 8. Vandal resistant mask, Box for masonry fitting
 - for basic module
 - for basic module and keypad
 - for extender
9. Roof
 - for 1 module
 - for 2 modules
10. Flush fixed box
 - for 1 module
 - for 2 modules
11. Roof and box for masonry fitting
 - for 1 module
 - for 2 modules

Technical parameters

2N Helios			
Number of buttons	1-54	Cover	External environment with sufficient rain protection
Connection with PBX	FXS – (internal) analogue telephone line according to standards CCITT	Operational temperature range	-20 - +60°C
Power supply	From telephone line	Switch – max. voltage/current	max. 48 V / 1 A AC
DC voltage drop	< 8 V (I = 25 mA)	Dimensions (1 module)	210 x 100 x 29 mm (H x W x D)
(off-hook)	< 16 V (I = 50 mA)	Weight	max. 500 g
Dialling	impulse / tone	Coverage	IP 53
Backlight – rated voltage	12 V		



Proudly distributing
2N Helios in Australia

MELBOURNE

Unit 4, 585 Blackburn Rd, Notting Hill 3168, VIC Australia
 Freecall 1800 817 807
 Phone +(613) 8562 9000
 Fax +(613) 8562 9099
 Email sales@alloy.com.au
 Web www.alloy.com.au

SYDNEY

Address 99 Baxter Rd, Mascot 2020, NSW Australia
 Freecall 1800 817 807
 Phone +(612) 8080 9600
 Fax +(612) 8080 9602
 Email sales@alloy.com.au
 Web www.alloy.com.au