


# 2N Helios IP connected to CCME 4.1

To configure CCME please download Cisco Configuration Professional 2.3 from ip adres below:

<http://tools.cisco.com/support/downloads/pub/ImageList.x?relVer=2.3&mdfid=281795035&sftType=Configuration+Professional+Software&optPlat=&nodecount=2&edesignator=null&modelName=Cisco+Configuration+Professional&treeMdfId=&treeName=Routers&modifmdfid=null&imname=&hybrid=null&imst=null&lr=Y>

2N Helios IP will be added as station number 3336, IP address 192.168.22.26

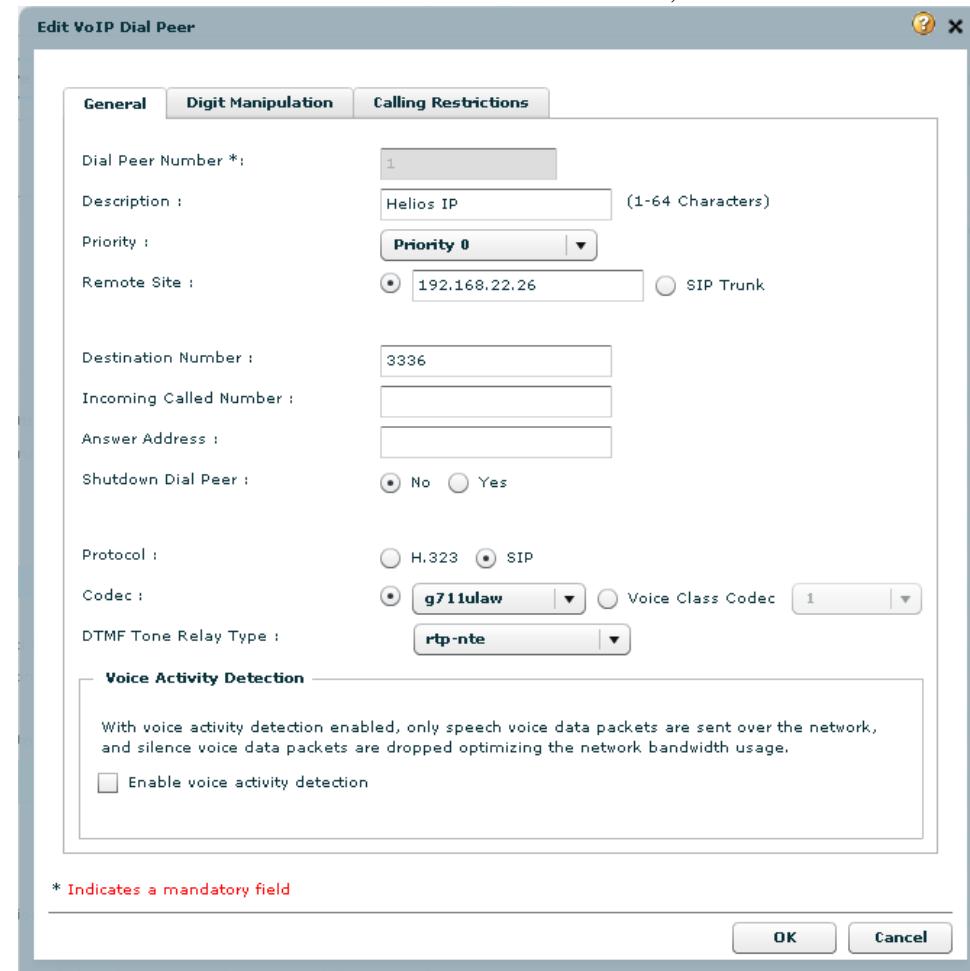

Cisco Configuration Professional

Application Help

Home Configure Monitor | ? Cisco Configuration Professional CISCO

Select Community Member:  
192.168.22.21

Configure > Voice > Dial Plans > VoIP

Filter | 2 rows retrieved |

Dial Peer Tag	Description	Destination Numbers	Incoming Called Numbers	Translation Profile Outgoing	Translation Profile	Remote Site
2	2N_VoiceBlue_Ne:	6.T				192.168.22.42
1	Helios IP	3336				192.168.22.26

Interface Management Router Security Voice  
Voice Mode Telephony Settings Advanced Telephony Setting  
Users, Phones and Extensions Trunks  
Dial Plans POTS VoIP Calling Restrictions Translation Rules and Pro  
Advanced Global Settings Telephony Features Basic Automatic Call Distribut  
Utilities Flash File Management Configuration Editor Save Configuration to PC Write to Startup Configuration Telnet Reload Device

Create... Edit... Delete



Information

Basic Settings

Advanced Settings

▪ Network

▪ Date and Time

▪ SIP Settings

▪ Web Server

▪ Audio

▪ Video

▪ Audio Codecs

▪ Video Codecs

▪ Streaming

▪ Auto Updates

▪ Display

▪ System log

▪ Miscellaneous

Tools

Logout



# SIP Settings

## User settings

Display name:	Helios IP
User ID:	3336
Domain:	192.168.22.21
Use auth ID:	Yes <input type="checkbox"/>
Auth ID:	3336
Password:	*****

## SIP proxy settings

Proxy address:	192.168.22.21
Proxy port:	5060

## SIP registration

Register Helios IP:	No <input type="checkbox"/>
Registration expires:	240 s
Registrar address:	
Registrar port:	5060

## Other settings

Local SIP port:	5060
Send keepalive packets:	Yes <input type="checkbox"/>
Starting RTP port:	5000
RTP Timeout:	2 s

