

KING Pro

Complete Protection for Internet Computers and Advanced Servers

- Line interactive design
- Fully digitized microprocessor controlled
- Smart RS-232 communication port
- Tel/modem internet surge suppression
- Boost and buck AVR
- Hot swappable battery by users *
- Extended back up time with battery pack *
- Surge protection output for critical load *
- AVR boost & buck LED *
- Overload, on-line, battery status LED
- Lightning and surge protection
- Short circuit and overload protection
- 50/60Hz frequency auto sensing
- EMI/RFI noise filter
- Cold start (DC power on)
- Advanced battery management (ABM)
- Energy saving (UPS sleep mode)
- Site wiring fault LED display**
- Automatically charging when UPS off
- History record of power failure events
- Schedule shutdown & reboot
- Back up, on-line, battery status, power status display by software

* features available on 800VA and up models

** feature only for 100V/110V/115V/120V model



KSL-500AP



425/525/625VA



800/1000/1200/1500VA




2200/3000VA

NIKKO®

ISO 9001 Certified Company

UPSMON plus Power Management Software

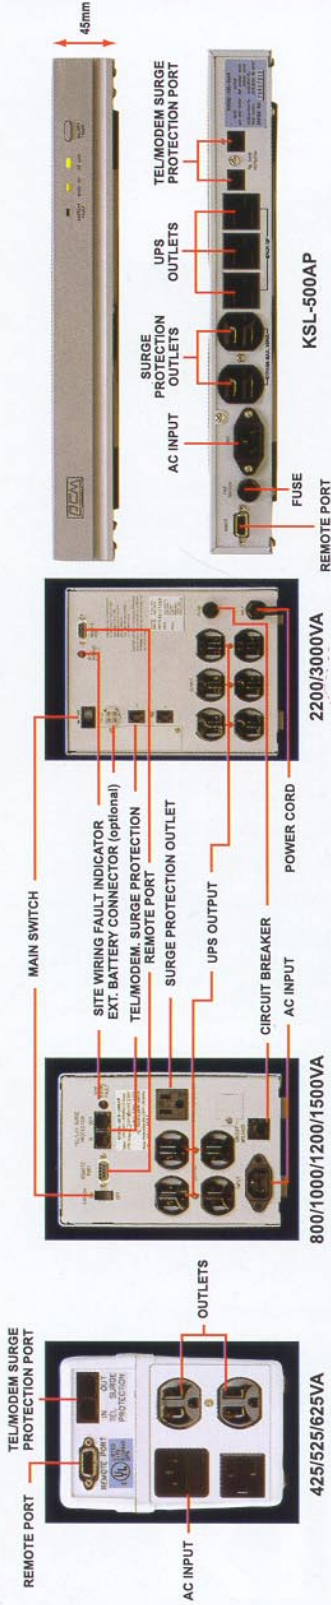

SPECIFICATION

MODEL	KIN-425AP	KIN-525AP	KIN-625AP	KSL-500AP	KIN-800AP	KIN-1000AP	KIN-1200AP	KIN-1500AP	KIN-2200AP	KIN-3000AP
INPUT	425VA	525VA	625VA	500VA	800VA	1000VA	1200VA	1500VA	2200VA	3000VA
OUTPUT	800/1000/1200/1500VA	2200/3000VA								
PROTECTION and FILTERING	Capacity Voltage Frequency (on battery) Frequency (on battery) Voltage Regulation AVR Transfer Time Spike Protection EMI/RFI filter Overload Protection Unit Input 10Base-T Cable Port Short Circuit									
BATTERY	Type Typical Recharge Time Protection Back-up Time (a PC with 15" monitor) Weight kg (lbs) Dimension (mm) WxDxH Battery Back-up Battery Low Overload									
INTERFACE	RS-232 Interface Ambient operation Audible noise									
ENVIRONMENT	Voltage Frequency Voltage (on battery) Frequency (on battery) Voltage Regulation AVR Transfer Time Spike Protection EMI/RFI filter Overload Protection Unit Input 10Base-T Cable Port Short Circuit Type Typical Recharge Time Protection Back-up Time (a PC with 15" monitor) Weight kg (lbs) Dimension (mm) WxDxH Battery Back-up Battery Low Overload RS-232 Interface Ambient operation Audible noise									

Remote Port

AC Input

Outlets

425/525/625VA

Surge Protection Outlets

UPS Outlets


AC Input

Fuse

Remote Port

KSL-500AP

45mm



Compatible with: Microsoft Windows, Solaris, SCO, AT&T, Hewlett-Packard, Novell, Sun, IBM, Compaq Digital, 3Com, NIKKO by PCM POWERCOM.

©2000 Powercom Co., Ltd. All rights reserved. All trademarks are property of their respective owners. Specifications subject to change without notice.

Complete Power Solution™
ISO 9001 Certified Company