



Welcome to the Yealink/Alloy Webinar



Welcome to our Reseller Webinar.

We will commence at:

Webinar 1: 9:00am AEST / 6am AWST / 11am NZDT

Webinar 2: 1:00pm AEST / 10am AWST / 3pm NZDT

Webinar audio available via your Computer (VoIP):

Preferable using a USB headset , or via similar equipment connected to your PC – see information in Alloy’s email about VoIP audio options and configuration, or see details on this link:

<http://tinyurl.com/bosh556>

Dial in to webinar audio via your phone with these details:

Australia

Toll: +61 (0)2 8014 4933

Access Code: 368-219-377

New Zealand

Toll: +64 (0)4 974 7213

Access Code: 368-219-377

Audio PIN: on your GoToWebinar Dashboard



Presented by

Craig Harrison

Pre-sales Technical Consultant

craig.harrison@alloy.com.au

Thomas Ludot

Alloy Technical Support

thomas.ludot@alloy.com.au

- Founded in 2001
- 100% focus on VoIP
- 10 Years of VoIP experience



- Located in
Xiamen Southeast
China



- Facilities with 10,000+ square meters
- More than 1200 workers
- Equipped with 6 assembly lines

- Professional VoIP R&D team with more than 100 engineers
- Proprietary solution
- Core team has 15 years of communication experience





World Wide Distribution



TI chipset and TI voice engine

- The No.1 VoIP chipset provider
- Advanced technology: robust, stable, high interoperability and superb clarity in voice & video transmission
- Consistent new product: Advanced Roadmap and continuous investment on R&D
- Proven quality:
- Yealink is the only IP phone partner of TI in mainland China



Yealink Handsets SIP-Txx



SIP-T18P



SIP-T20P



SIP-T22P



SIP-T26P



SIP-T32P



SIP-T28P



SIP-T38G

Yealink Common Features SIP-Txx

- ❑ TI HD Chipset
- ❑ HD codec
- ❑ HD speakers, microphones and handsets
- ❑ SRTP TLS and HTTPS
- ❑ TFTP FTP HTTP HTTPS PnP
- ❑ Speaker Phones
- ❑ External Headsets
- ❑ IP V6



Yealink Common Features SIP-Txx

- ❑ TI HD Chipset
- ❑ HD codec
- ❑ HD speakers*, microphones* and handsets*
- ❑ SRTP* TLS* and HTTPS*
- ❑ TFTP FTP HTTP HTTPS* PnP
- ❑ Speaker Phones*
- ❑ External Headsets*
- ❑ IP V6*





- ❑ 1 Lines
- ❑ Display. Paper Based
- ❑ Ethernet POE
- ❑ 3-way conferencing
- ❑ 2 Programmable Keys



- ❑ 2 Lines
- ❑ Display. 2 lines x 15 Characters
- ❑ Dual Ethernet, POE
- ❑ 3-way conferencing
- ❑ Speakerphone & Headset jack
- ❑ 2 Programmable Keys



- ❑ 3 Lines
- ❑ LCD display. (132 x 64 pixels)
- ❑ Dual Ethernet, POE
- ❑ 3-way conferencing
- ❑ Speakerphone & Headset jack
- ❑ 3 Programmable Keys



- ❑ 3 Lines
- ❑ LCD display. (132 x 64 pixels)
- ❑ Dual Ethernet, POE
- ❑ 3-way conferencing
- ❑ Speakerphone & Headset jack
- ❑ 13 Programmable Keys
- ❑ Expansion Modules (Max. Of 6)



- ❑ 6 Lines
- ❑ 4.3" LCD display. (320 x 160 pixels)
- ❑ Dual Ethernet, POE
- ❑ 3-way conferencing
- ❑ Speakerphone & Headset jack
- ❑ 16 Programmable Keys
- ❑ Expansion Modules (Max. Of 6)



- ❑ Dual Gigabit Ethernet, POE
- ❑ 3" Colour TFT LCD display. (400 x 240 pixels)
- ❑ Colour Contact Display

- ❑ All other features as per the SIP-T22P



- ❑ Dual Gigabit Ethernet ports
- ❑ 4.3" TFT LCD colour display. (480 x 272 pixels)
- ❑ Colour Contact Display
- ❑ All other features as per the SIP-T28P



Ordering



SIP-T18	SIP-T18P	SIP-T18PEX
PSU only, no POE port	POE & PSU	POE no PSU
SIP-T20	SIP-T20P	SIPT20PEX
PSU only, no POE port	POE & PSU	POE no PSU
SIP-T22	SIP-T22P	SIP-T22PEX
PSU only, no POE port	POE & PSU	POE no PSU
	SIP-T26P	
	POE & PSU	
	SIP-T28P	
	POE & PSU	
	SIP-T32G	
	POE & PSU	
	SIP-T38G	
	POE & PSU	

SIPPWR5V 5V 1200mA power adapter for Yealink phones approx. \$16

- ❑ Video Phone
- ❑ Touch Screen
- ❑ 4 Lines
- ❑ Dual Ethernet, P
- ❑ H.263 & H.264
- ❑ Adaptive Bandwidth
- ❑ Speakerphone
- ❑ 7" TFT LCD colour display. (800 x 480 pixels)
- ❑ Video Monitor & Microphone external connectors



Call Features	BroadSoft Features
3-way local audio conference	Device management
LDAP phonebook	Features synchronization (DND, FWD)
BLF (Busy Lamp Field)	BLF (Busy Lamp Field)
20 Soft DSS keys	BLF List
Dial plan same as T28	DNS SRV
Video Applications	MWI Count
Door Phone Application	
IP Camera Application	Others
Deploy and Security	Picture dial
SRTP/TLS	Contact picture
Tr069	Soft key and GUI programmable
HTTPS certification management	

VP-530



Model	Yealink	Polycom	Grandstream	Cisco	
	VP-530	VVX1500	GXV3175	9971	8945
LCD Size	7 inches	7 inches	7 inches	5.6 inches	5 inches
LCD Resolution	800x480	800x480	800x480	640x480	640x480
Touch Screen	✓	✓	✓	✓	X
Camera	2M	2M	1.3M	2M	2M
HD Voice	✓	✓	X	✓	✓
PoE	✓	✓	✓	✓	✓
BLF	✓	✓	X	✓	✓
LDAP	✓	✓	X	✓	✓

ALLOY

Accessories

Yealink
EASY VOIP



- ❑ 38 Keys
- ❑ Paper based labels
- ❑ Dual colour LED
- ❑ Maximum 6 Units per phone
- ❑ Maximum 228 programmable keys
- ❑ For use with T26P, T28P and T38G




- ❑ 20 Keys
- ❑ 2 colour LCD panel
- ❑ Dual colour LED
- ❑ Maximum 6 Units per phone
- ❑ Maximum 240 programmable keys
- ❑ For use with T26P, T28P and T38G



- ❑ Monaural Headset
- ❑ Noise cancelling microphone
- ❑ Quick disconnection cord
- ❑ Light weight (50 grams)
- ❑ 330 degree rotatable microphone boom
- ❑ Protect from acoustic burst



- ❑ Wireless Headset Adapter
- ❑ Fully compatible with Jabra & Plantronics
- ❑ Answer and terminate calls from headset
- ❑ Works with T26P & T28P

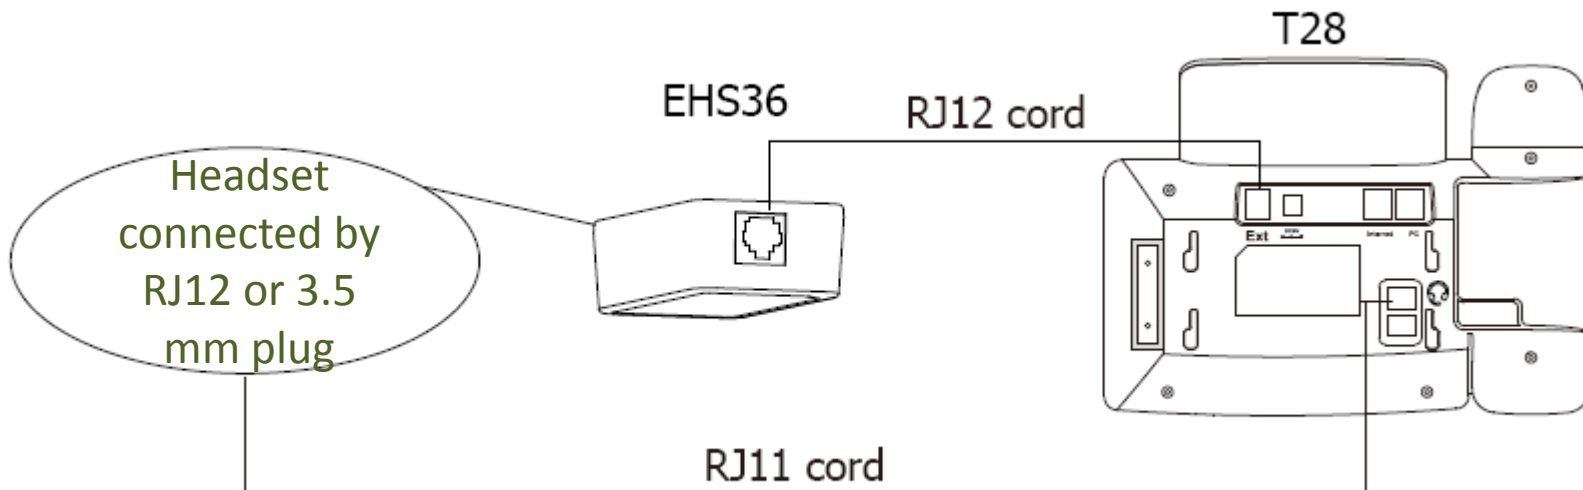

Any Questions?

