

PoE Power Injector

The Power Injector eliminates the need for a PoE enabled hub. In a typical installation, the Power Injector is connected between a non-PoE hub and a CyberData paging device, providing inline power capability to an Ethernet Cat 5 cable.




Specifications

Boxed Weight	0.5 lbs.
Part Number	010867

Specifications

Input voltage	90 VAC to 264 VAC
Input frequency	47 Hz to 63 Hz
Inrush current	less than 60A at 230VAC cold start, 25°
Output voltage.....	+48 VDC
Output current	0.35 A
Meet green mode	< 0.5W (at no load)
Efficiency	75%~85% depends on models
Holduptime.....	16 ms typical at rated load and 115VAC
Over voltage protection	latch off
Short circuit protection.....	auto recovery

Over current protection	auto recovery
Operating temperature	-20°C to 60 above 40°C, derate at 2.5% per degree
Cooling	free air convection
Storage temperature	-20°C to +85
EMI	FCC class "B" CISPR22 level "B"
EMS	EN61000-4-2, -3, -4, -5, -6, -11
Safety	UL 60950-1, LPS CSA C22.2 No. 60950-1 TUV EN60950-1

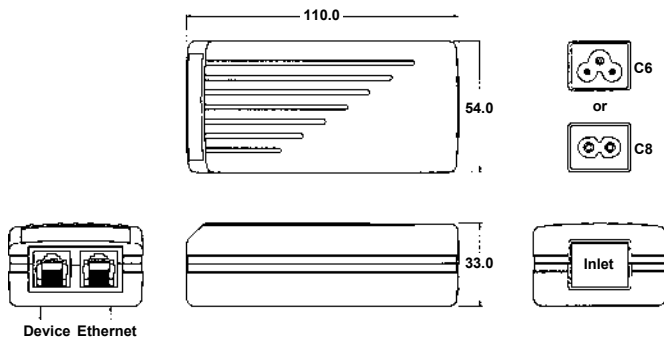

Notes:

- Dimensions shown in mm as left. Tolerance: ± 1 mm (Excluding cables).
- Size: 54.0 X 110.0 X 33.0 (mm)
- Packing:
Net weight: 140 g approx. / unit
Gross weight: 19 kg approx. / carton, 120 units / carton
Carton size (mm): 535 (L) x 489 (W) x 314 (H)
- Connectors:
AC input :
IEC 320 C8: SNP-POEX
C6: SNP-POEX-3 (* X: 7/9/T)
Device connector : RJ45
Ethernet connector : RJ45
- Box Color : Black

PoE Power Injector



1800 817 807

www.alloy.com.au
sales@alloy.com.au

Proudly distributed in Australia by

Alloy Computer Products Pty Ltd

Melbourne

4/585 Blackburn Road, Notting Hill, VIC 3168
Tel: (03) 85629000 Fax: (03) 8562 9099

Sydney

Suite 204, Milsons Landing, 6A Glen Street,
Milsons Point, NSW, 2061
Tel: (02) 8080 9600 Fax: (03) 8562 9099