

VoIP Intercom

The CyberData SIP-enabled VoIP Intercom is a Power-over-Ethernet (PoE 802.3af) and Voice-over-IP (VoIP) two-way communications device that easily connects into existing local area networks (LANs) with a single cable connection. The intercom is compatible with most SIP-based IP PBX servers that comply with SIP RFC 3261. Its tamper-resistant design allows the unit to be mounted securely and safely.

Typical Applications

- Access control
- Door entry phone
- Emergency phone
- Mass notification

Features

- PoE 802.3af enabled (Powered-over-Ethernet)
- SIP compliant
- Adaptive full-duplex voice operation
- Network web management
- Network adjustable speaker volume and microphone sensitivity
- Network downloadable firmware
- Doubles as a paging speaker
- Dry relay contact for auxiliary control
- Peer-to-peer capable
- Door closure and tamper alert signal
- Optional Torx screws with driver kit



Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or +5 volts at 1000mA
Operating Temperature	-30 to 55 C (-22 to 131 F)
Payload Types	G711, A-law and μ -law
Regulatory Compliance	FCC Class A, UL 60950
Dimensions	5" x 5" x 2.5" (H x W x D)
Warranty	2 years limited
Boxed Weight	2.0 lbs.
Part Number	010935

Indoor Intercom and Emergency Intercom models are also available:



Indoor Intercom
#011111



Emergency Intercom
#011035






Wall Mount Keypad
#011113



Flush Mount Keypad
#011123

VoIP Intercom

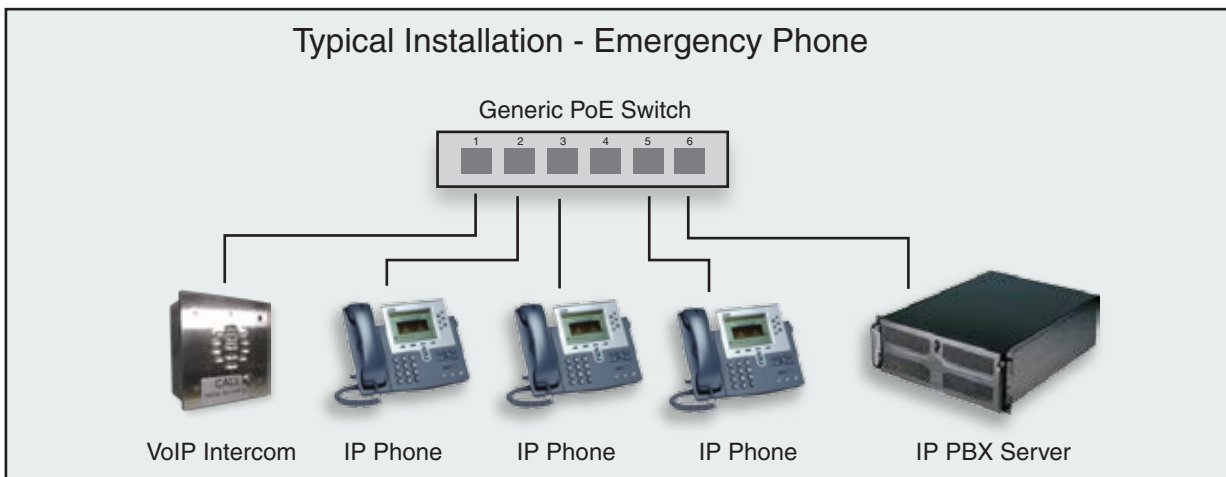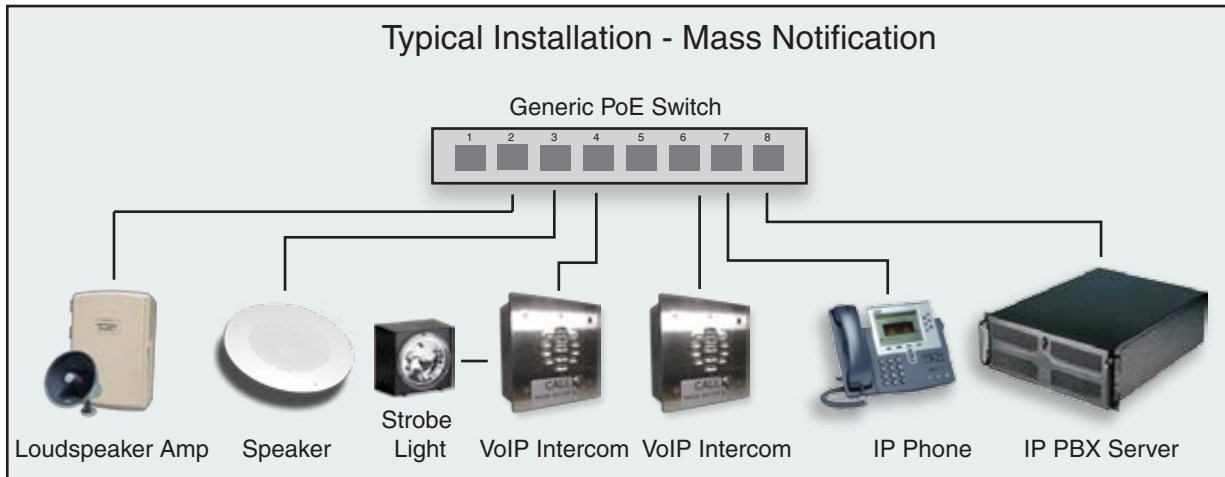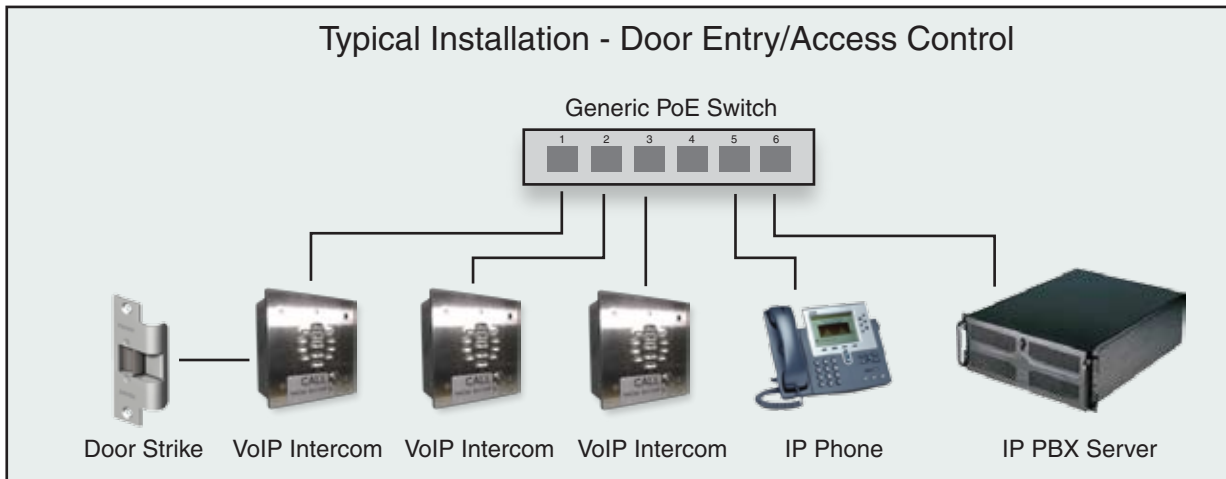

ALLOY

Proudly distributed in Australia and New Zealand by
Alloy Computer Products Australia Pty Ltd
sales@alloy.com.au
www.alloy.com.au **1800 817 807**