

### SIP Call Button

This device is mounted under a desk or in a discrete location. If an event takes place, the user depresses the button. The Call Button automatically makes a call to a pre-set phone or extension number. When the called number answers, the Call Button plays and repeats a stored audio file. This stored audio file is uploaded by the administrator to meet the needs to the installed location.

#### **Features**


- User downloadable message up to 80 seconds
- Single button call to pre-set number
- · Continuous repeat of message
- Call progress light
- Event-controlled relay
- Tamper sensor
- Web-based setup
- PoE-powered

#### Use areas include:

- Classrooms
- Banks or financial institutions
- Court rooms
- Front lobby reception areas




Specifications	
Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or +5 volts at 1000mA
Operating Temperature	-30 to 55 C (-22 to 131 F)
Payload Types	G711, A-law and μ-law
Regulatory Compliance	FCC Class A, UL 60950
Dimensions	5" x 5" x 1.5" (H x W x D)
Warranty	2 years limited
Part Number	011049

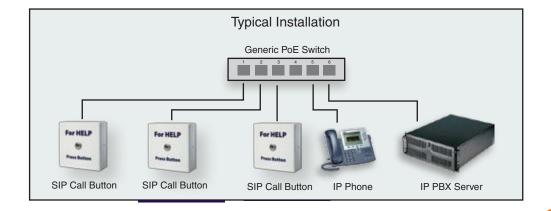



## SIP Call Button

# **Mounting Options**

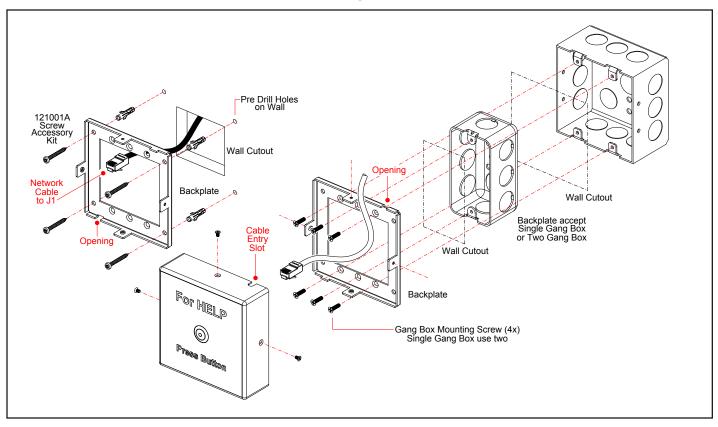



www.alloy.com.au sales@alloy.com.au

Proudly distributed in Australia by
Alloy Computer Products Pty Ltd

Melbourne 4/585 Blackburn Road, Notting Hill, VIC 3168 Tel: (03) 85629000 Fax: (03) 8562 9099

Sydney Suite 204, Milsons Landing, 6A Glen Street, Milsons Point, NSW, 2061 Tel: (02) 8080 9600 Fax: (03) 8562 9099