

SIP Strobe

When installed, the wall-mounted SIP Strobe operates as a visual alerting device. The device can be set up as part of a ring group (call group) with the Strobe engaged as notification of incoming calls.

Features

- Meets ADA requirements for telephony signalling and notification
- Event-controlled relay
- Tamper sensor
- Web-based setup
- PoE-powered


Use areas include:

- Classrooms
- Banks or financial institutions
- Court rooms
- Manufacturing warehouses
- Office
- Indoor only




Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or 10 to 20 VDC at 1000 mA
Light power	90 candela (5-Watt LEDs)
Flash rate	2 per second
LED MTBF	100,000 Hours
Operating Temperature	-30 to 55 C (-22 to 131 F)
Regulatory Compliance	FCC Class A, UL 60950
Dimensions	5" x 5" x 1.5" (H x W x D)
Warranty	2 years limited
Part Number	011087

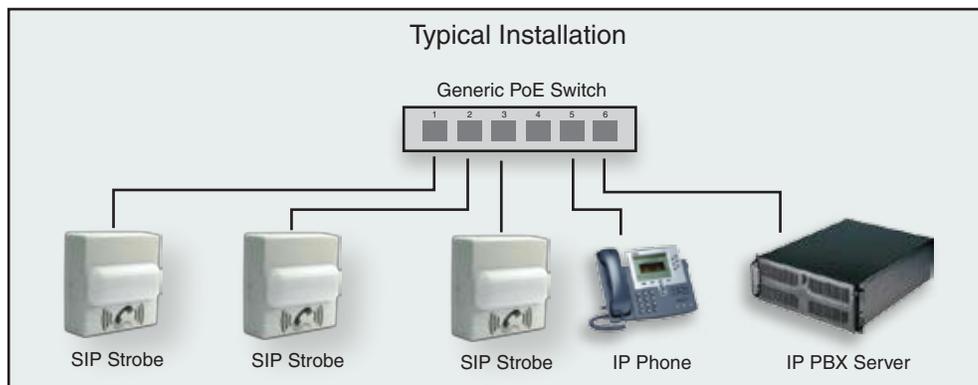

SIP Strobe

Mounting Options

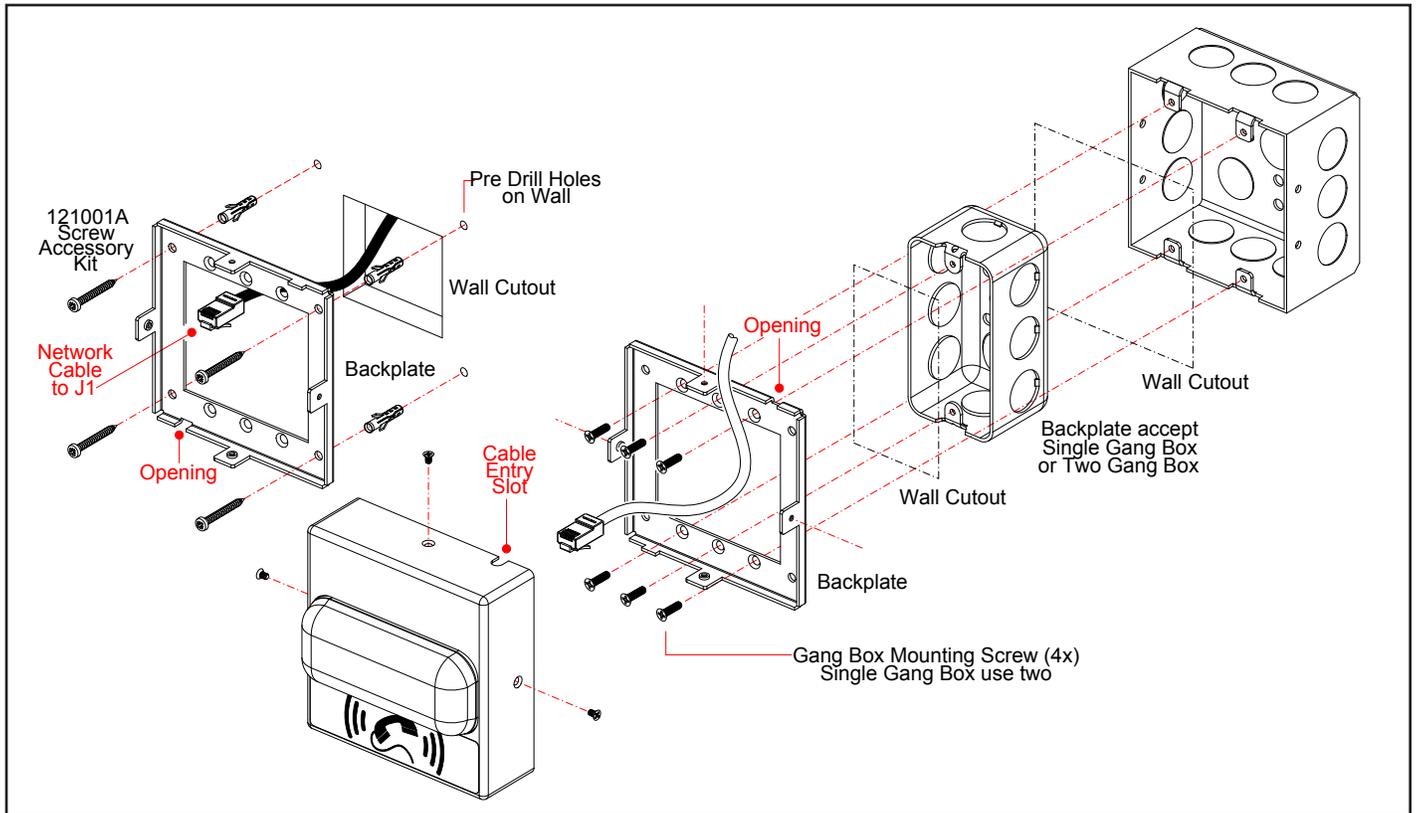

ALLOY

1800 817 807

www.alloy.com.au
sales@alloy.com.au

Proudly distributed in Australia by
Alloy Computer Products Pty Ltd

Melbourne
4/585 Blackburn Road, Notting Hill, VIC 3168
Tel: (03) 85629000 Fax: (03) 8562 9099

Sydney
Suite 204, Milsons Landing, 6A Glen Street,
Milsons Point, NSW, 2061
Tel: (02) 8080 9600 Fax: (03) 8562 9099