

Singlewire Informacast/Berbee-enabled VoIP V2 Ceiling Speaker

The Singlewire-enabled VoIP V2 Ceiling Speaker is for use with Singlewire's paging and emergency notification software InformaCast® or InformaCast CK.

This PoE-powered device hooks up easily to new and existing Singlewire installations.



Features

- InformaCast compliant
- InformaCast CK compliant
- Web-based configuration
- Web-based firmware upgradeable
- Plenum-rated enclosure
- Small footprint
- High efficiency speaker driver
- PoE 802.3af-enabled (Powered-over-Ethernet)
- Network and external speaker volume control
- Can drive one external analog speaker for greater coverage

Singlewire-enabled Speaker Shown with Clock Kit



Specifications

Sensitivity 96dB / 1W / 1M S.P. Level

Output 10 Watts Peak Power

Ethernet I/F 10/100 Mbps

Protocol InformaCast

Power Input PoE 802.3af

Payload Types G711, A-law and μ -law

Regulatory Compliance FCC Class B, UL 60950, CE

Dimensions 9" x 2.4"

Boxed Weight 4.0 lbs

Warranty 2 years limited


Part Number

011102*, Standard Color, RAL 9002, Gray White


011103, Optional Color, RAL 9003, Signal White

*This number replaces the 011065 Speaker number.

VoIP V2 Ceiling Speaker

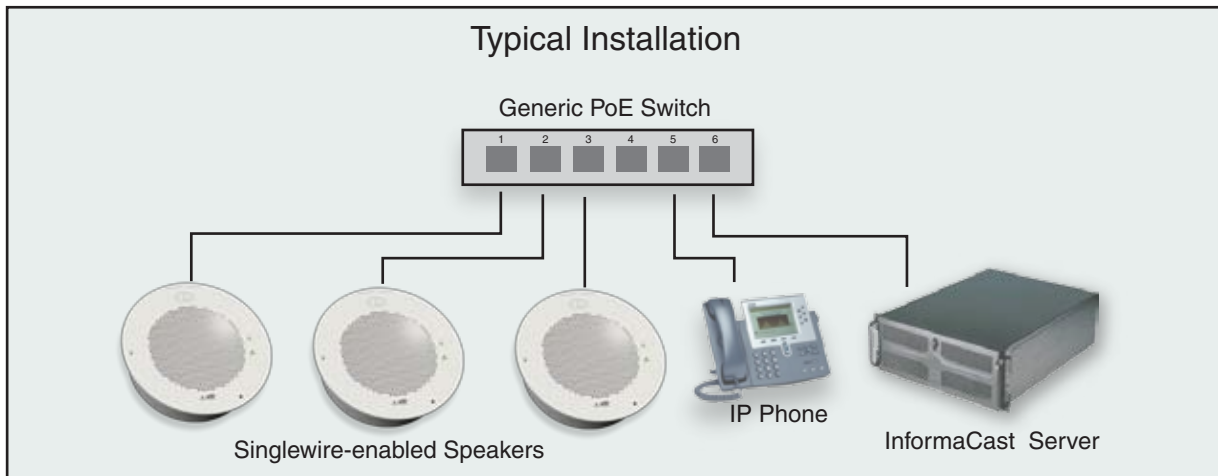

Singlewire-enabled Speaker with Extra Speaker Connection

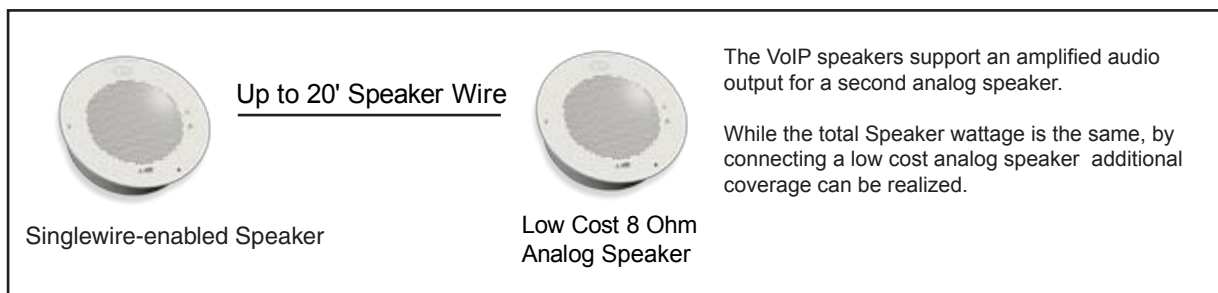

Mounting

