

# V3 VoIP Zone Controller

## 4-Port Audio-Out

**CyberData**

The IP Endpoint Company

The CyberData VoIP V3 Zone Controller with Audio-Out enables access to existing paging speakers through a VoIP phone system. The interface is designed to use a standard paging amplifier with audio inputs and supports paging up to 15 zone groups from a VoIP phone.

### New Features

- Delayed paging
- Night Ringer
- Compatible with more IP/PBX servers

### Features

- SIP RFC 3261 compatible
- PoE 802.3af enabled (Power-over-ethernet)
- Dual-speed ethernet 10/100 Mbps
- 4 Paging zones
- 15 Paging zone groups
- Page all
- Web-based configuration
- Web-based firmware upgradeable
- Connector for external power supply
- Small footprint




### Specifications

Protocol	SIP RFC 3261 Compatible
Ethernet I/F	10/100 Mbps
Power Input	PoE 802.3af or 48VDC
Operating Temperature	-30 to 55 C (-22 to 131 F)
Payload Types	G711
Output Signal Amplitudes	2.0 VPP maximum
Output Level	+2dBm nominal
Total Harmonic Distortion	0.5% maximum
Regulatory Compliance	FCC Class A, UL 60950
Dimensions	6.2" L x 4.5" W x 1.22" H
Weight	1.6 lbs.
Warranty	2 years limited
Boxed Weight	1.8 lbs.
Part Number	011171

**CyberData**

The IP Endpoint Company

# V3 VoIP Zone Controller

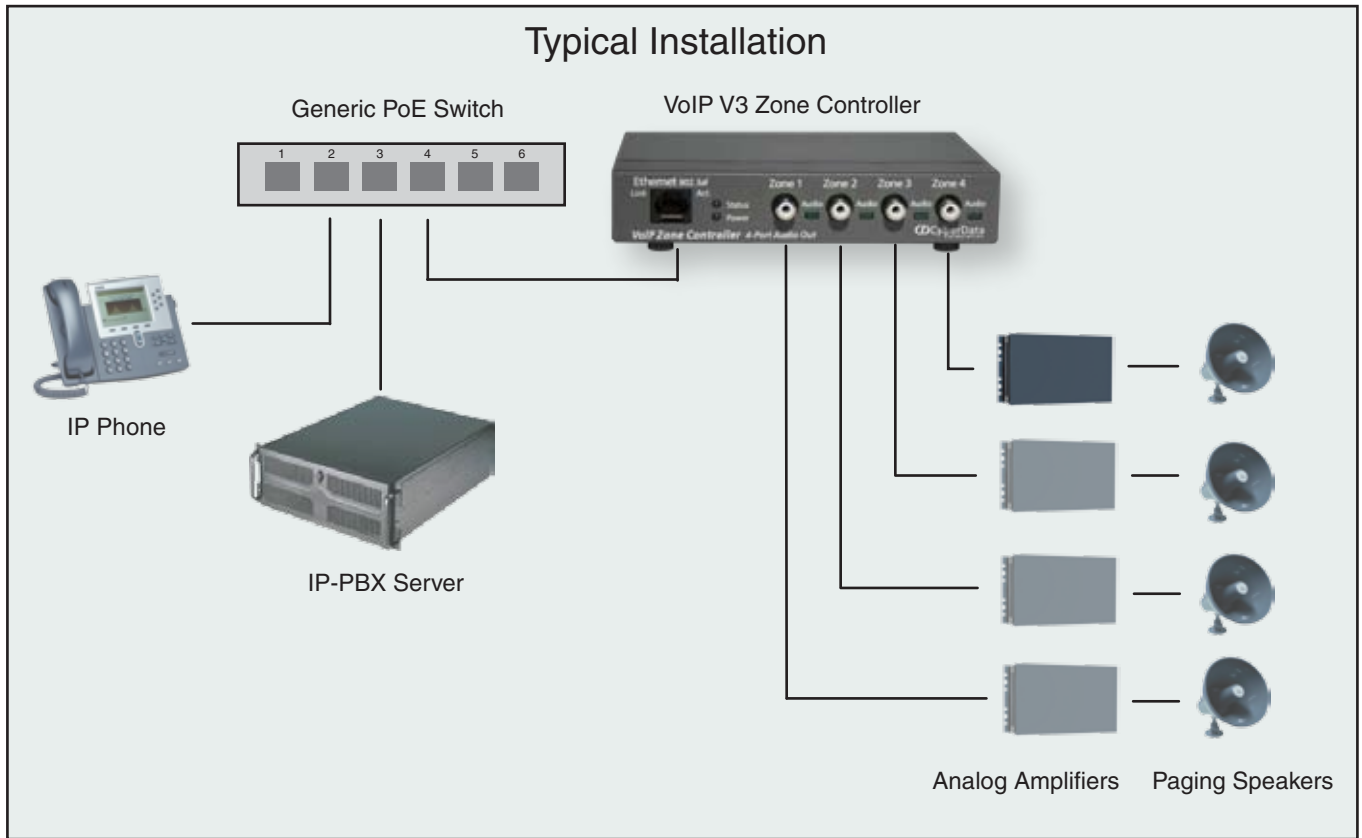

**ALLOY**

1800 817 807

[www.alloy.com.au](http://www.alloy.com.au)  
[sales@alloy.com.au](mailto:sales@alloy.com.au)

Proudly distributed in Australia by  
**Alloy Computer Products Pty Ltd**

**Melbourne**  
4/585 Blackburn Road, Notting Hill, VIC 3168  
Tel: (03) 85629000 Fax: (03) 8562 9099

**Sydney**  
Suite 204, Milsons Landing, 6A Glen Street,  
Milsons Point, NSW, 2061  
Tel: (02) 8080 9600 Fax: (03) 8562 9099