


Quadro[®]4Li

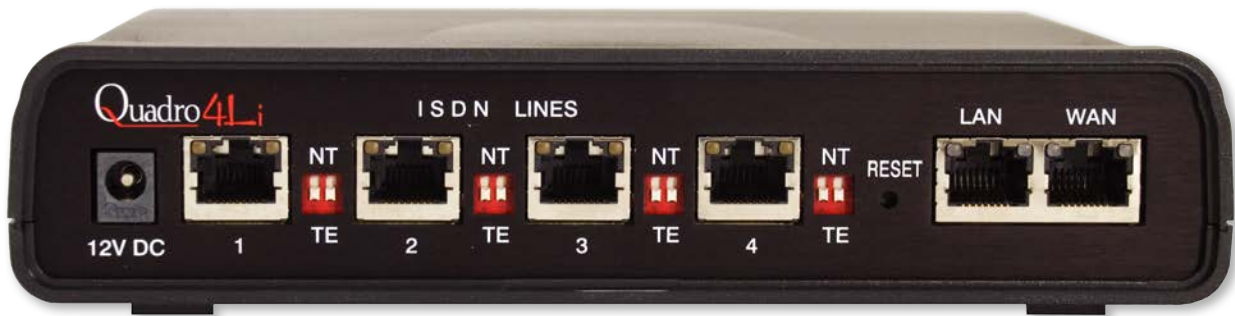

Quadro4Li: The IP PBX with 4 ISDN BRI Ports

The Quadro4Li is ideal for the small businesses which require IP PBX features only available in large enterprise solutions. The four ISDN BRI lines allow this solution to offer higher concurrent calls for busy offices, allowing 8 PSTN and 12 VoIP calls.

It economically delivers a wealth of IP PBX features and Key System benefits. Voice mail, auto attendant, on-hold music or messaging, caller ID with distinctive ringing, call pickup, paging and intercom and many other features are included. Sophisticated auto-recognition and auto-configuration capabilities simplify installation and operation. The administrator can modify automatic assignments through the graphical user interface.

High Density Solution

With the choice of 4 ISDN BRI ports or using an Internet Telephony Service provider, the number of concurrent calls is greatly increased. Supporting up to 24 extensions, this SMB solution is a perfect fit for large offices. The available features on the Quadro4Li remain the same as with other Quadro IP PBX models.

Legacy Phone System Replacement

Epygi designed the Quadro4Li for deployment right out of the box as a turnkey solution. Using advanced plug-and-play IP phones and multiple ISDN BRI ports for PSTN access, this IP PBX is fully featured without the expensive feature licenses. As a bonus, Epygi allows the BRI ports to operate in NT mode to support legacy BRI phones.

What are Your VoIP BENEFITS?

- NT and TE Mode Support
- PBX Feature Flexibility
- Turn Key Installation
- ISDN or IP Options

Telephony

PBX Features

Call blocking*, Forwarding, Hold, Blind Transfer and Transfer with consultation*
 Call relay*, Call waiting*
 Caller ID Detection, Voice mail
 Call park*, Pickup*, Paging*, Intercom*
 Multi-level auto attendant with Interactive Voice Response (IVR) and VoiceXMLv2 support*
 Voice mail with SMS notification*
 Distinctive ringing*
 Speed dialing*
 Many extension ringing*
 Receptionist
 Call hunting*, Hiding Caller ID*
 Automated Call back from
 Auto Attendant*
 Hold music
 Call statistics
 Do Not Disturb service*
 Unified messaging*
 3-way conferencing*
 T.38 fax, fax relay and clear channel fax*
 Unified Fax Messaging*
 Busy auto-redial*
 Directory assistance*
 Dial plans (call routing)*
 IP Routing*
 Call Queue*
 Key System Emulation

Voice and Video Features

Voice Coding:
 G.711, G.726 (16, 24, 32, 40 Kbps),
 G.729A, iLBC (13,33 kbit/s, 15,2 kbit/s);
 VAD, CNG, G.168 echo cancellation
 G.722 pass-through point-to-point
 HD call
Video Coding:
 H.263 and H.264 pass-through point-to-point video call
VoIP Encryption:
 SRTP
VoIP Signaling:
 SIP, SIP/TLS
DTMF:
 In band & out of band signaling support.

VoIP Data and Signaling Protocols

ITU-T G711, G.726, G729 Annex A;
 IETF RFC 3951- iLBC; ITU-T Q.23, Q.24;
 Bellcore GR.506, GR.181; ITU-T G.168-
 2000, 2002; ETS_300659_1,2,3;
 SIP, SIPS/TLS (RFCs: 2246, 3261, 3263,
 3265, 3311, 3323, 3324, 3325, 3428,
 3515, 3578, 3581, 3725, 3842, 3856,
 3863, 3891, 3892, 4028, 4235)
 SDP (RFC: 2327, 4568)
 RTP/SRTP (RFCs: 1889, 1890, 2833,
 3389, 3550, 3551, 3555, 3711, 4733,
 3952),
 Fax over IP (ITU-T: T4, T30, T38, V17,
 V21, V27 ter, V29)

ISDN Signaling

ITU-T: Q.921, Q.931 (DSS1), Q.951; ETSI
 ETS300 102 (NET5); NTT INS1500 for
 Japan

Connectivity

LAN IP Phones

16 SIP phones
 8 additional SIP phones may be added
 with a feature key
 Remote IP extensions may be enabled
 for all IP phones.

System Capacity

12 simultaneous VoIP calls with
 external parties
 Remote IP extensions may be enabled
 for all IP phones.

Premise Connection

Up to 24 IP Phones
 1 Ethernet 100BASE T (RJ45).

Uplink Connection

1 Ethernet 10BASE T (RJ45)

ISDN Connection

4 ISDN ports to the Central Office or
 local PBX (RJ45), NT and TE modes
 supported

Billing

Radius Client (RFCs: 2865, 2866)

Extensions

Up to 100 extensions including virtual,
 remote and local.
 Extensions can be registered on different
 SIP servers.

Internet

STUN/NAT traversal (RFC 3489)
 IPsec VPN with DES, 3DES and AES
 encryption in tunnel mode (RFCs: 2402,
 2406, 2409). Manual and automatic
 IKE key support
 PPTP VPN
 L2TP VPN
 Firewall security via:
 NAT (Network Address Translation)
 IDS
 Policy and service-based filtering
 Stateful inspection firewall
 DHCP server on the LAN side
 DHCP client on the WAN side
 DNS server with forwarding functionality
 SNTP (Simple Network Time Protocol)
 server/client for computer clock
 synchronization
 PPPoE connection to the ISP with PAP/
 (MS)CHAP authentication
 IP DIFFSERV for QoS
 Mail client to send voice and fax
 messages (.wav and .tif) as e-mail
 attachments and system notifications.
 DNS (DYNDNS) support with third party
 NAT/Router with port forwarding and
 port translation

System

Management

Multilingual WEB interface accessible
 from LAN and WAN (HTTP/HTTPS),
 Password control
 Remote diagnostics and
 software upgrade
 Auto-provisioning
 VoIP Carrier Wizard
 Download/restore configuration
 Legible and editable configuration files
 Auto-configuration of IP phones
 via TFTP and HTTP
 SNMP monitoring and configuration
 Third Party Call Control XML RPC
 is available to order
 Reset button with factory reset option
 Custom Language Pack
 Outlook Feature
 Hot Call

Diagnostics/Testing

LEDs: Busy, Info/Fault
 ISDN diagnostics
 Remote testing and VoIP diagnostics
 Power-up diagnostics

Environmental

Physical Dimensions

Desktop devices, wall-mountable:
 Measurements: 7.41" x 6.24" x 1.77"
 (19 x 16 x 4.5 cm)
 Weight: 13 ounces (360 g)

Conditions

41°F - 104°F (5°C - 40°C) operating
 temperature
 41°F - 140°F (5°C - 60°C) storage
 temperature
 5% - 90% non-condensing humidity

Power Supply

Input 100 - 240 VAC; 50/60 Hz; 0.5 A
 Output 12.0 VDC; 1.5 A

Regulatory Compliance

Safety: UL 60950; CSA 22;
 EMC: FCC Part 15 Class B;
 EN55022 Class B, EN55024;
 Telecom: TBR3 (ISDN)

* Features not available in Key System Emulation Mode

Proudly distributed in Australia by
 Alloy Computer Products Pty Ltd

Melbourne

4/585 Blackburn Road, Notting Hill, VIC 3168
 Tel: (03) 85629000 Fax: (03) 8562 9099

Sydney

Suite 204, Milsons Landing, 6A Glen Street,
 Milsons Point, NSW, 2061
 Tel: +61 2 8080 9600 Fax: +61 3 8562 9099
 www.alloy.com.au sales@alloy.com.au