

CME-822E

Industrial 10-Port Managed PoE Switch With PoE Injector

Features

High Performance Network Switching Technology

- ✓ Complies with IEEE 802.3, IEEE 802.3u, IEEE 802.3X, IEEE 802.1p, IEEE 802.1q, IEEE 802.1d, IEEE 802.1w, IEEE 802.1x, IEEE 802.3ad, IEEE 802.3z
- ✓ Provides 8 x 10/100 Mbps Ethernet ports with RJ-45 connector
- ✓ Provides 2 x 10/100/1000T Mini-GBIC socket (Combo with 1000TX port)
- ✓ Embedded 8 ports PoE Injector Function classified as PSE
- ✓ Supplies 15.4 watts of power per port full load with PoE
- ✓ RJ-45 Port support auto MDI/MDI-X crossover
- ✓ Provides broadcast storm protection
- ✓ Redundant X-Ring recovery time < 10 ms on full load
- ✓ Supports Dual Homing – RSTP over X-ring
- ✓ Supports Ring coupling
- ✓ SNMP for network management
- ✓ IGMP snooping for filtering multicast traffic
- ✓ QoS / ToS to increase network packet determinism
- ✓ VLAN for easy network planning
- ✓ Event notification by e-mail, SNMP trap, Syslog & Relay output


- ✓ Online Port Mirroring for online debugging
- ✓ IP security to define access levels for protection
- ✓ Configurable by WEB browser
- ✓ IntraVUE Network Management software compatible

Robust Industrial Design

- ✓ Robust Aluminum case complying to IP-30 housing standard
- ✓ Supports operating temperature -40 to 80°C
- ✓ DIN-Rail, Panel mount or desktop installation
- ✓ High level of immunity to electromagnetic interference & power supply surges typically found in industrial plant environments or external curb side enclosures

Reliable Power Design


- ✓ Wide range redundant power design
- ✓ Equipped with Redundant power inputs
- ✓ Supports 48VDC redundant power with polarity reverse protection
- ✓ Terminal block present for master and slave power output

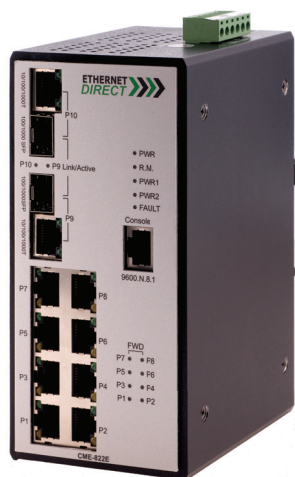

Overview

The Cobra series CME-822E is a highly reliable and fault-tolerant Industrial 10-port Managed Power over Ethernet Switch. It supports eight PoE injector ports classified as power source equipment (PSE). CME-822E offers state of the art design with eight 10/100 Mbps Ethernet ports and two small form pluggable (SFP) ports that supports Gigabit SX or LC depending on your existing network structure. The innovative SFP fiber slot design provides user the flexibility to insert different fiber modules, either multi-mode or single-mode at various distances, whether you require typical 10km or overhaul 40 km, 80 km and 120 km distances. With its high performance switching device, CME-822E provides redundant self-recovery mechanism in less than 10ms on full load which allows you to establish a redundant Ethernet network to build a back-up ring topology. Dual homing and Ring coupling are supported to add reliability by allowing a device to be connected to be network by way of two independent connection points. CME-822E offers powerful network management functions including SNMP, SMTP, STMP, Quality of Service, Class of Service, IGMP, Snooping, LACP, DHCP, VLAN, RMON, Port Trunk, Port Mirror, User Authentication (Radius) and IP Security. The CME-822E is equipped with a terminal block to provide dual power inputs with reverse polarity protection. Its IP-30 housing protection, wide operating temperature of -40 to 80°C and DIN-Rail mounting is suitable for an industrial environment. The CME-822E is a plug-and-play solution for your Power over Ethernet applications.

Dimensions

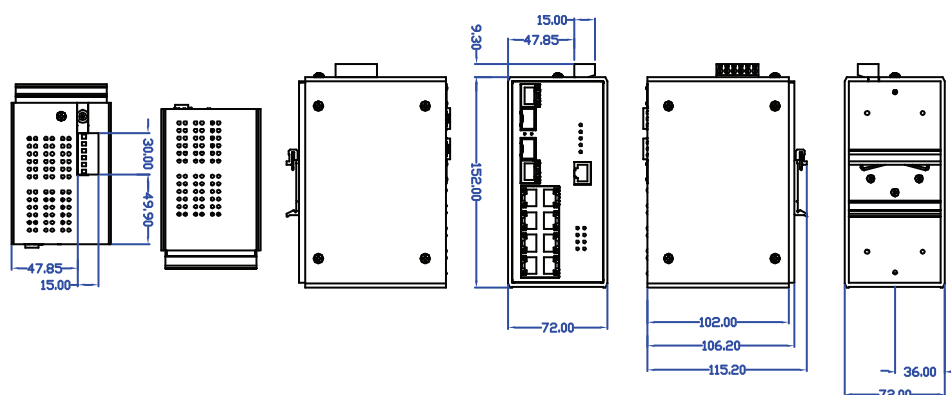

Hardware Specifications

Interface

RJ-45 Ports	8 10/100Base-TX auto-negotiation speed, Full/Half duplex, auto MDI/MDI-X (PoE ports)
Fiber Port	2 10/100/1000T Mini-GBIC socket (Combo with 1000TX port)
LEDs	Per unit: Power (Green), Power 1 (Green), Power 2 (Green), Fault (Yellow), Master (Green) 8 port 10/100: Link/Activity (Green), Full duplex/Collision (Yellow) Mini GBIC: Link/Activity (Green) Giga Copper: Link/Activity (Green), speed (1000 Green)
Alarm	Relay output for port break and power failure
Power Input	VDC 48V Redundant power with polarity reverse protect function and removable terminal block
Power Protection	ESD (Ethernet) : Present Surge : 1500VDC Power Reverse Polarity: Present
Power Consumption	9.64 watts
Dimensions	IP-30 standard, 72 mm (W) x 152 mm (H) x 105 mm (D)
Installation	DIN-Rail, Panel mount or desktop

Environmental

Operating Temperature	Extended: -40 to 80°C
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Humidity	5%~90% RH (Non-condensing)

Technology Specifications

Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.3af Power over Ethernet IEEE802.1d Spanning Tree/ IEEE802.1w Rapid Spanning Tree IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE 802.1x User Authentication (Radius)
Network Media	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E cable EIA/TIA-568 100-ohm (100m)

Protocol Technology	CSMA/CD
Switching Architecture	Store and Forward

Performance

Data Transfer Rate	14,880 pps for Ethernet port 148,800 pps for Fast Ethernet port 1,488,000pps for Gigabit Fiber Ethernet port
MAC Address	8K
Memory Buffer	4Mbytes
Back-plane	5.6 Gbps
Port Statistics	Supported
Flow Control	Full-duplex and Back Pressure for Half-duplex
Packet Filter	Broadcast/Multi-cast/Unknown Broadcast storm packet filter
Transfer Packet Size	8.3 Mpps at 64 bytes

Regulatory Approvals

EMI	FCC Class A
EMS	EN6100-4-2 EN6100-4-3 EN-6100-4-4 EN6100-4-5 EN6100-4-6 EN61000-4-8 EN61000-4-11
Safety	UL, cUL, CE/EN60950
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Free Fall	IEC60068-2-32
Class 1 DIV 2	Pending *
DNV	Pending *
Environmental	WEEE, RoHS
MTBF	325,000 hrs based on Mil-Hdbk-217F, GB
Warranty	5 years

Management Specifications


Redundancy	Supports X-ring redundant back-up path Supports Dual Homing Supports Ring Coupling. Recovery time less than 10 ms Web interface management can activate X-ring protocol
-------------------	---

Management Protocols	SNMP V1/V2c, RMON 1 (Statistics, History, Alarm, Events) SMTP, SNTP, IGMP V1 & Query mode, DHCP/Client, TFTP
MIB	MIB-II, Bridge MIB, Ethernet like MIB, VLAN MIB, Private MIB
Configuration	Web interface management Default button is available to restore default settings
VLAN	Support Port based VLAN/Tag VLAN(256 entries) VLAN ID(Up to 4K) GVRP(256 Groups) Static VLAN groups up to 256, the VLAN ID can be assigned from 1 to 4094
Quality of Service	Full-duplex and Back Pressure for Half-duplex
Port Mirroring	Broadcast/Multi-cast/Unknown Broadcast storm packet filter
MAC IP Security	Supports ingress and egress MAC address filter and static source MAC address lock, Dumping MAC address Table Ingress/Egress MAC address security, per port support learning 50 MAC addresses
IP Security	Support 10 IP address accounts for system management security for Web, SNMP and Telnet management security to prevent intruder.
IGMP Snooping	v1 and v2, query mode, multicast group with 256 entries
LACP Port Trunk	3 Trunk groups/Maximum 4 trunk members
Port Mirror	Global system supports 3 mirroring types: "RX, TX and Both packet". Maximum of 8 entries
Port Trunk	802.3ad with LACP function. Up to 3 trunk groups and maximum group member up to 4 ports
Class of Service	Per port 4 queues
E-mail Warning	Pre-defined events
IP Security	Cold start, link down, link up, authorization fail, X-ring topology Change, Power alarm trap, Trap station up to 3
IGMP Snooping	Support up to 6 e-mail accounts
Firmware Upgrade	By TFTP

Power over Ethernet Specification

PoE Compliance	100% IEEE 802.3af compliant
PoE Classification	Power Sourcing Equipment (PSE)
PoE Voltage	45 to 48 VDC depending on power input
PoE Power	Up to 15.4 watts per channel
PoE Pin Assignment	RJ-45 port # 1~# 8 support IEEE 802.3af End-point, Alternative B mode Per port provides 15.4W ability Positive (VCC+): RJ-45 pin 4,5 Negative (VCC-): RJ-45 pin 7,8
PoE Protection	Over-temperature, over-current, over/under-voltage and transient

SFP Specifications

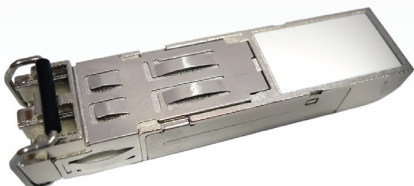

- Compliant with IEEE 802.3z Gigabit Ethernet Standard
- Single mode LX versions are compliant with Fiber Channel 100-SM-LC-L standard
- Multimode SX versions are compliant with Fiber Channel 100-M5-SN-I & 100-M6-SN-I
- Industry standard small form pluggable SFP package
- Duplex LC connector
- Single power supply 3.3V
- Class 1 laser product complies with EN 60825-1

Optical Specifications

Model	Fiber type (um)	Connector	Wavelength (um)	TX Power (min)	TX Power (Max)	Rx Power (Min)	Rx Power (Max)	Link Budget (dbm)	Distance (km)
SFP-SX-LC	Multi-mode 50/125	Duplex LC	850nm	-15dBm	-8dBm	-34dBm	-8dBm	19dBm	550m
SFP-LX-LC-10	Single-mode 9/125	Duplex LC	10nm	-15dBm	-8dBm	-34dBm	-8dBm	19dBm	10km
SFP-LX-LC-40	Single-mode 9/125	Duplex LC	1310nm	-4dBm	-1dBm	-24dBm	-1dBm	20dBm	40km
SFP-LX-LC-80	Single-mode 9/125	Duplex LC	1550nm	0dBm	5dBm	-24dBm	5dBm	24dBm	80km

Ordering Information

CME-822E	Industrial 10-port Managed PoE Switch With 2 SFP port, Extended Temperature -40 to 80 °C
SFP-SX-LC	SFP 850nm Multimode transceiver, 0.55 km
SFP-LX-LC-10	SFP 1310nm Single mode transceiver, 10 km
SFP-LHX-LC-40	SFP 1550nm Single mode transceiver, 40 km
SFP-ZX-LC-80	SFP 1550nm Single mode transceiver, 80 km

Recommended Accessories

DR-7548	76.85W/1.6A DIN-Rail 48 VDC power supply
DR-12048	120W/2.5A DIN-Rail 48 VDC power supply
DR-24048	240W/5A DIN-Rail 48 VDC power supply