


# MAXHUB

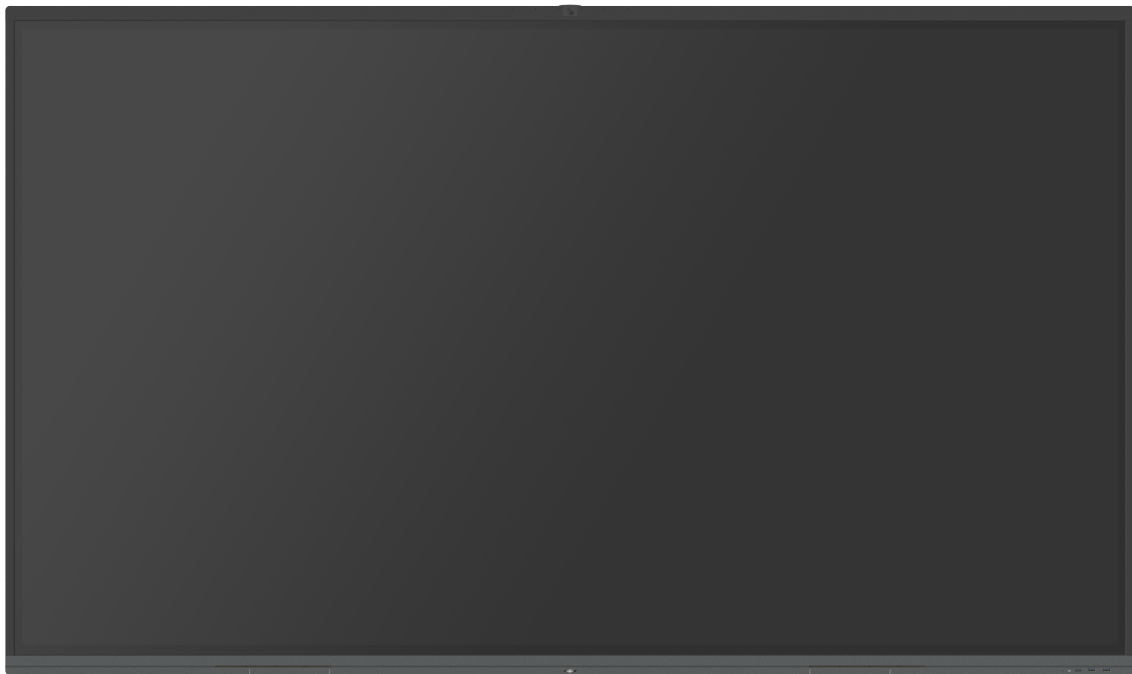


## **V5 Classic Series 75" Interactive Flat Panel Specification**

# MAXHUB

## I. Features

- **High Colour Gamut 4K Display:** Make the meeting come to life with the clear & vivid display.
- **Camera:** 12MP camera that delivers unparalleled clarity during teleconferences.
- **Microphone:** 6-element microphone array receives voice from up to 8 metres away. The built-in auto-gain, noise reduction, voice localisation algorithms make the voice more intelligible and make voice communication more reliable.
- **2.1 Stereo Sound:** Feel it, instead of only hear it. A woofer, along with two seam speakers at the front delivers stereo sound that bridge the distant offices.
- **USB Type-C:** It is not only about high speed data transfer, but may also access to the built-in microphone array and camera, offering flexible ways to meet online.

## II. Dimensions

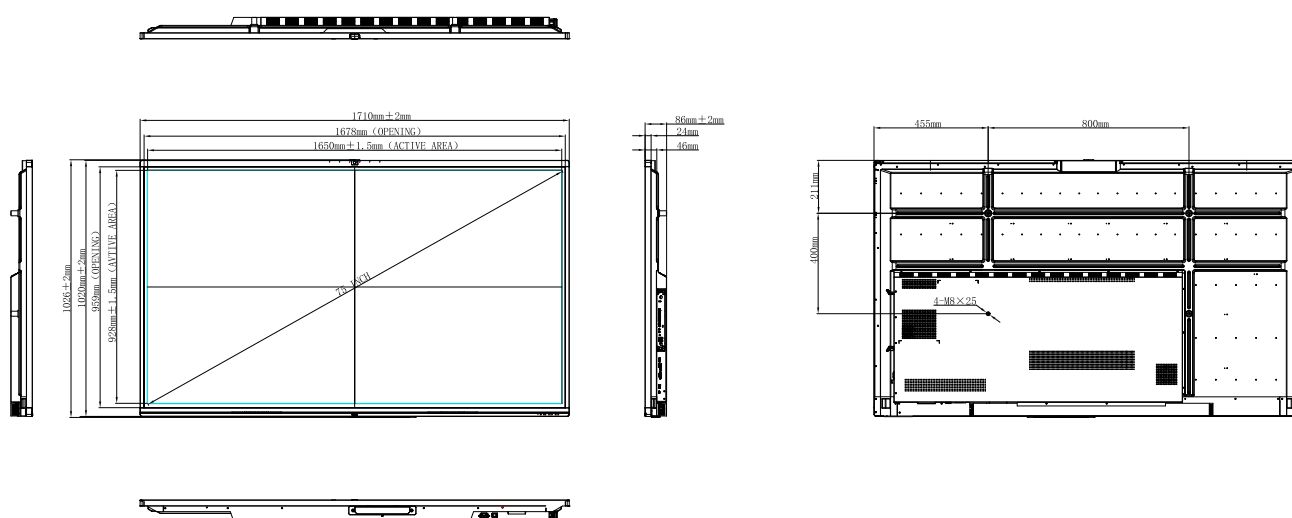

## III. Display

Display	
Size	75 inch
Type of Screen	VA
Response Time	6.5ms
Ratio	16:9
Display Area	1650.24 (H)×928.26 (V)mm
Resolution	3840×2160
Pixel Pitch	0.42975×0.42975mm

# MAXHUB

Refresh Rate	60Hz
Colour Depth	1.07B (10bit)
Colour Gamut (Typ.)	90% NTSC
Contrast Ratio	4000:1
Viewing Angle	178° (H/V)
Backlight Structure	DLED
Brightness (Typ.)	350cd/m <sup>2</sup>
Lifespan	≥30,000 hours

## IV. Touch System

Touch System	
Touch Principle	Infrared
Touch Points	20 Points
Supported Systems	Windows 10/Windows 8/Windows 7/Windows XP/Android/Linux/macOS X/Chrome
Minimum Recognisable Object	2mm
Touch Object	Finger, Stylus
Response Time	≤10ms
Touch Accuracy	±1mm
Writing Height	≤2mm
Touch Resolution	32768(W)×32768(D)
Multi-colour	Dual Colour with Single Stylus

## V. Speakers

Speakers	
Channel	2.1
Power	2×10W+20W

## VI. Microphone

Microphone	
Quantity	6
Voice Pickup Range	0~8m

# MAXHUB

## VII. Camera

Camera	
Quantity	1
Pixels	12MP
Location	In the Middle of the Upper Bezel

## VIII. Power

Power	
Power Input	100V-240V~50Hz/60Hz 4.5A
Maximum Power Consumption	450W
Standby Power	≤0.5W

## IX. I&O Ports

I/O Ports	
HDMI In	1
USB 2.0	1
USB 3.0	2
USB Type-C	2
TOUCH	1
AUDIO OUT	1
RS232	1

## X. Optional Modules

Optional Modules	
Model No. of PC Modules	MT51A
Model No. of Android Module	SA08
Model No. of Wireless Module	SI06

# MAXHUB

## XI. Physical Specification

Physical Specification	
Dimensions	1710×1026×86mm
Package Dimensions	1860×280×1140mm
Thickness (including Wall Mount)	116mm (WIB9060G)
VESA Specification	800×400mm
Screw Type	M8×25mm
Net Weight	51.2kg
Gross Weight	68.9kg

## XII. Accessories

Accessories	
Power Cable	×1(3 metres)
Stylus	×2
Wall Mount	×1

## XIII. Documents

Documents	
Quick Guide	×1
Warranty Card	×1

## XIV. Environment

Environment	
Operating Temperature	0°C-40°C
Operating Humidity	10%-90%RH
Storage Temperature	-20°C-60°C
Storage Humidity	10%-90%RH
Altitude	≤5000 metres

# MAXHUB

## XV. Statement

Size and weight may vary by configuration and manufacturing process. Please refer to the actual product.

The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product.

The description, illustrations, etc. in the document may subject to change in accordance with the latest product specification and performance.

Should the change as mentioned above in the document become necessary, the document may be updated without written notice.



NOTICE: The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.