



## SmartNode™ Branch eXchange (SNBX)

*A fully-loaded Enterprise IP PBX appliance made easy for any business. Supporting up to 64 simultaneous calls, the SNBX is plug and play to fit any network—bringing you Unified Communications without breaking the bank.*



### Plug and Play

*Comes with 3CX Phone System and Windows 7 already installed.*

### Up to 64 Calls

*Provides up to 128 simultaneous calls without transcoding, 64 calls with transcoding and supports up to 500 extensions.*

### Monitoring and Management

*Web GUI for device monitoring and application management. Also includes built-in SmartNode Gateway configurator.*

### Fits Your Network

**BYOP (Bring your own phone)**—Choose your own IP phones or softphones; no vendor lock-in.

**Keep Your Existing Equipment**—Add a SmartNode Gateway to connect existing analog/ISDN equipment.

**SIP Trunks or PSTN**—Save on monthly call costs using SIP Trunks or receive and make calls via the standard PSTN using SmartNode Gateways and VoIP Routers.

The SNBX is a plug and play appliance loaded with Microsoft Windows 7 and 3CX Phone System, an award-winning software-based IP PBX for Microsoft Windows. Capable of supporting up to 64 calls, the SNBX can ship already loaded with any 3CX edition supporting 4, 8, 16, 32 and 64 simultaneous calls.

In addition to running 3CX Phone System, the SNBX web GUI provides device monitoring and application management; plus, is open to 3rd party applications. No keyboard or mouse is required since the web GUI can be accessed from anywhere.

The SNBX fits *your* network by supporting most IP phone or softphone. You can keep your trusted PSTN lines or analog/ISDN phone equipment by simply adding Patton's SmartNode Gateways. Or you can provide secure, prioritized VoIP by using a SmartNode VoIP Router to connect to your SIP trunks. Setup is quick and easy as the SNBX provides a built-in SmartNode configuration tool.

### 3CX Phone System


Break free from expensive proprietary phone systems and move up to an open standard IP PBX that increases employee productivity and costs much less.

Evolve your communications by enabling employee mobility. Calls can be made and answered seamlessly from outside the office, and voicemail and faxes received via email.

Globalize your business by connecting branch offices and re-directing local customer service numbers via the internet to your phone system at negligible cost.

3CX Phone System is made to scale with your business and save you money on consultants' fees. Supported plug-and-play IP phones are simple to add with the administrator interface, and supported Patton hardware has configuration templates build right in. Overcome the limitations of hardware-based PBX systems, reduce costs significantly and add advanced communication features that will make your company more efficient and competitive!

Visit [www.patton.com/smartnode](http://www.patton.com/smartnode) for more information on SmartNode products.

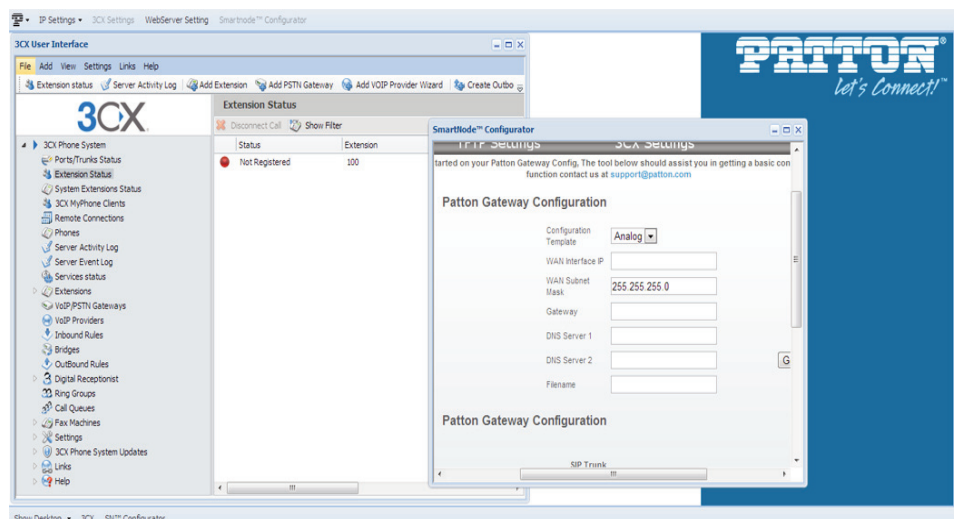


## Application Diagram

### PSTN



### SIP Trunks

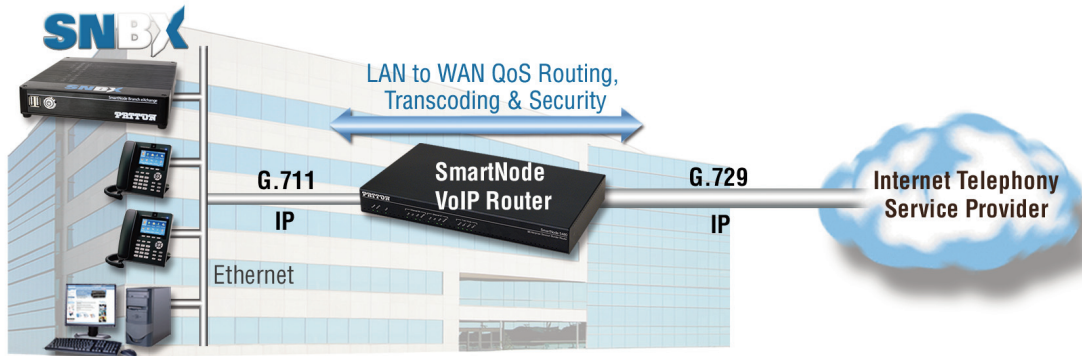

## Specifications\*

### Processor

Intel Dual Core Atom with Hyper Threading 1.8 Ghz

### Memory

4GB of DDR3 RAM  
250GB hardrive

### Ethernet

1 10/100/1000 Ethernet Port

### Operating System

Windows 7

### 3CX Phone System

Version 11

### Dimensions

1.4 x 7.5 x 7.7 in.

### Weight

2.8 lbs. (1.27 kg)

### External Power Supply

12 Volt 5 Amp

### Capacity

64 calls with Transcoding • 128 with RTP Relay • 20 cps • 100 CAPS

## Ordering Info

### General Phone System Features

Call Logging, Call Reporting • Blind Call Transfer, Attended Call Transfer • Call Forward on Busy or No Answer • Call Routing (DID)/Caller ID • Conference Calling • Auto Attendant/Digital Receptionist • VoiceMail/Music on Hold • Ring Groups & Hung Groups • Central Phonebook • Call Parking and Pickup • Call Queuing • Call Recording • Dial by Name • MWI—Message Waiting Indicator • BLF Status Updates • Conference Rooms • Intercom • Paging

### Softphones

Supports Windows, Android 1.6 and iPhone 4.0 and Up • Manage Softphone from Management Console • Includes Tunnel to Avoid NAT Problems • Auto-Provisioning • Remote Configure

### SIP Standards Support

Fully Supports RFC 3261 • SIP Forking • Establish SIP Trunks with other SIP Servers

### Management and Scalability

Web-Based Management Console • Configuration Wizard • Real Time Web-based System Status • Integrated Web Server • Automated Backup and Restore • Firewall/NAT Friendly Configuration of External Extensions via Tunnel • MS Windows Server Certified • Integrated Enterprise Database (PostgreSQL) • VM Ware/Hyper V

### Unified Communications & Mobility

3CX MyPhone Self-Service User Portal • Receive VoiceMail via Email • Make Video Calls • Advanced Forwarding Rules Based on Caller ID, Time and Type of Call • Integrate Branch Offices

with 3CX Bridges • Standards-based Presence Information • Integrated Fax Server • Receive Faxes via Email as PDF

### IP Phone Management

Automatic Phone Provisioning • Remotely manage IP phones • Manage IP Phones Network-Wide • Plug and Play Support • Provision Network-Wide with Correct Settings • Restart one or all Phones Remotely • Manage Firmware Network-Wide • Update Firmware Network-Wide

### 3CX MyPhone

Web-based Utility • Transfer Calls • Shows Incoming Calls • Shows Caller ID • Shows Personal Call History • Divert Calls to VoiceMail v Queue Monitoring • Shows Status of Other

Extensions • Run as Presence Monitor with Desk Phone

### 3rd Party Applications Integration

Microsoft Outlook Integration • Salesforce Integration • HTTP API to Integrate with any Web CRM • Microsoft Exchange 2007 / 2010 UM

### Devices and Providers

Supports Popular IP Phones • Supports VOIP Gateways & cards • Make and Receive Skype Calls • Supports Popular SIP/VoIP Providers • SIP Trunking Support • Free Communication Link to 3CX and other SIP Servers

### Codecs (Voice Compression)

G711 (A-law and  $\mu$ -law), GSM, Speex, Ilbc • G722 • G729

\* Specifications subject to change without notice.

**PATTON**<sup>®</sup>  
Let's Connect!<sup>™</sup>

07MSNBX-3CX-DS1

Patton is a registered trademark and the terms SmartNode, DownStreamQoS, and SessionRouter are trademarks of Patton Electronics Company in the United States and other countries.

All Rights Reserved © 2013, 3CX

**ALLOY**

Proudly distributed in Australia and New Zealand by Alloy Computer Products Pty Ltd

**Melbourne**  
4/585 Blackburn Road, Notting Hill, VIC 3168  
Tel: (03) 85629000 Fax: (03) 8562 9099

www.alloy.com.au sales@alloy.com.au

**Sydney**  
Suite 204, Milsons Landing, 6A Glen Street,  
Milsons Point, NSW, 2061  
Tel: (02) 8080 9600 Fax: (03) 8562 9099