

VoIP Paging Gateway

The CyberData VoIP Paging Gateway enables access to existing paging speakers through a VoIP phone system. The interface is designed to use an existing analog zone controller with a TAM interface and supports paging up to 99 zones from a VoIP phone.

The gateway has an FXO port that connects to the FXS port on the zone controller.

Features



- SIP RFC 3261 compatible
- For one-way paging systems
- Dual speed 10/100 Mbps
- Configurable DTMF tones to Zone Controller
- Web-based configuration
- Web-based firmware upgradeable
- Power-over-Ethernet (PoE 802.3af) enabled
- Connector for optional external power supply (not included)
- Small footprint
- IGMP



Specifications

Protocol	SIP RFC 3261 Compatible
Ethernet I/F	10/100 Mbps
Power Input	PoE 802.3af or 48VDC
Operating Temperature	-30 to 55 C (-22 to 131 F)
Payload Types	G711
Regulatory Compliance	FCC Class B, UL 60950, CE
Dimensions	6.11"L x 4.05"W x 1.15"H
Warranty	2 years limited
Boxed Weight	1.8 lbs.
Part Number	010846

VoIP Paging Gateway

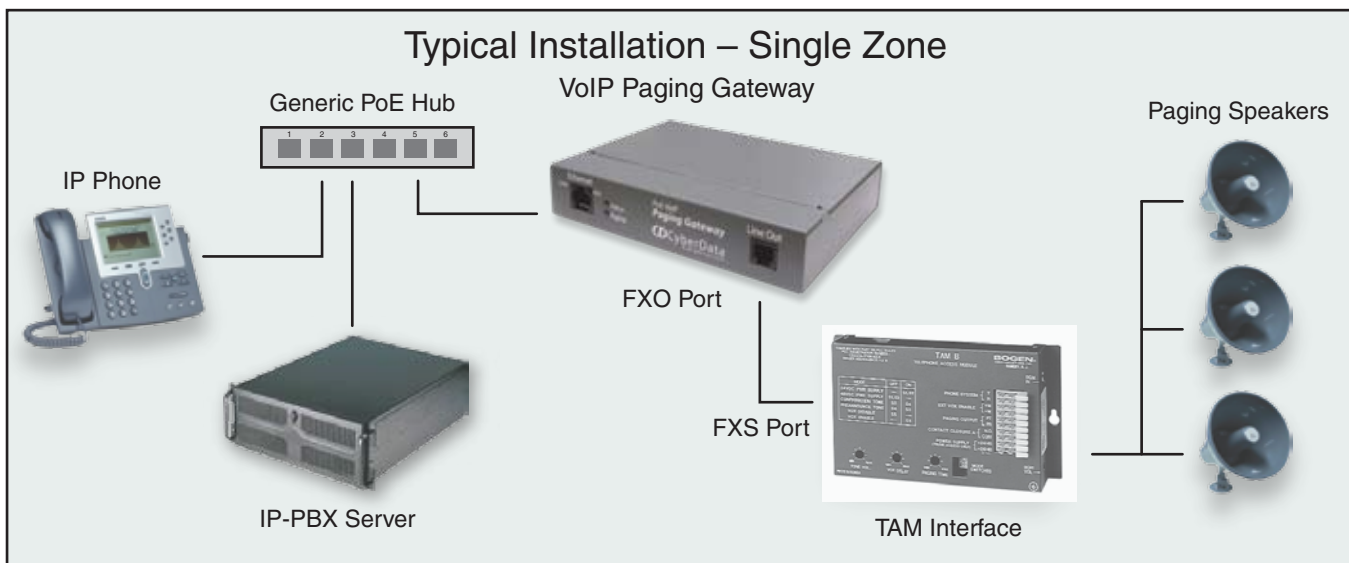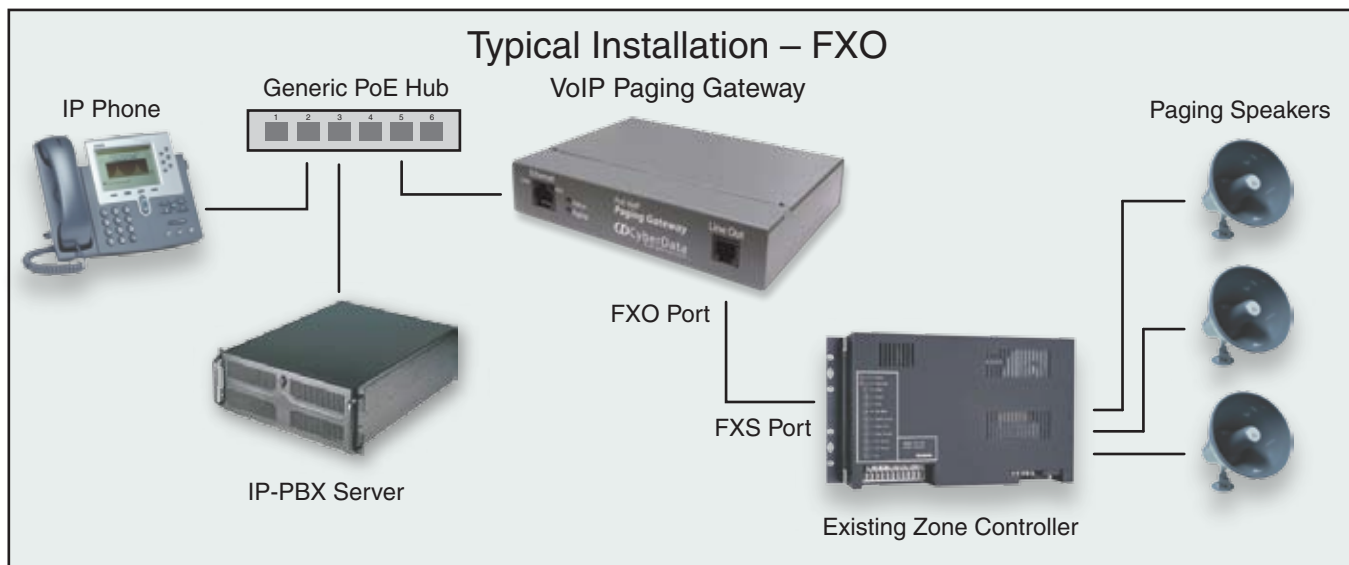

ALLOY

1800 817 807

www.alloy.com.au
sales@alloy.com.au

Proudly distributed in Australia by

Alloy Computer Products Pty Ltd

Melbourne

4/585 Blackburn Road, Notting Hill, VIC 3168
Tel: (03) 85629000 Fax: (03) 8562 9099

Sydney

Suite 204, Milsons Landing, 6A Glen Street,
Milsons Point, NSW, 2061
Tel: (02) 8080 9600 Fax: (03) 8562 9099