



BODi rS™ BD007

Bandwidth-on-Demand Bonding Router

Patton's BODi rS is small, light and full featured. Unique bonding, load balancing and failover technology ensures bandwidth robustness and network survivability. All this combined with IPsec VPNs and WiFi mesh capability makes BODi rS the ideal fixed or mobile solution for secure, seamless network connectivity and backup. Always. Everywhere.

Ultimate On-The-Go Performance

The BODi rS mobile VPN bonding router automatically shares Internet traffic across wired, wireless & satellite links. This increases connection stability, reliability and makes maximum use of all available bandwidth. Users also have the ability to scale bandwidth on-the-go, adding or removing connections, giving priority to lower cost links when demand allows, thus minimizing costs while still providing excellent reliability that scales as needed.

BODi rS also guarantees uptime making it the ideal solution for mobile connectivity with network failover and bandwidth robustness.

Key Features

- Multi-modem bonding avoiding network loss
- Internal universal power supply
- Load balancing & intelligent failover
- Bandwidth allowance control
- VPN 256-bit AES encryption for highly secure communications
- Built-in dual WiFi—delivering WiFi Mesh capabilities
- Capability to prioritize links—reducing costs
- Automatically switch to best available link
- Rack mountable option

Survivability: Network Bandwidth Assurance

BODi rS combines up to seven 3G/4G, WiMAX, LTE, VSAT, WiFi, and other mobile connections to deliver consistently high speeds and five nines availability. Combine up to four USB modems, three Ethernet modems and add broadband landline connections for blazing fast Internet connectivity and data transfer anywhere, anytime.

BODi rS is the perfect solution for high availability connectivity and Internet failover. This is especially important for applications in e-Healthcare, security alarm companies and critical infrastructure where loss of connectivity can be catastrophic, resulting in huge revenue losses and potential risk to human life.


Mobility: Fully Portable & Rapidly Deployable

A highly durable, rugged enclosure, and multiple bonded connections make BODi rS the ultimate mobile bandwidth-on-demand solution.

By using BGAN & VSAT networks, remote and marine applications can avail of high speed & reliable connectivity while on the go. By aggregating multiple wireless links, BODi rS offers users broadband-like Internet speeds for high quality reliable communications.



Bandwidth-on-Demand Bonding—Bond multiple mobile Internet connections for broadband-like speeds while on-the-go

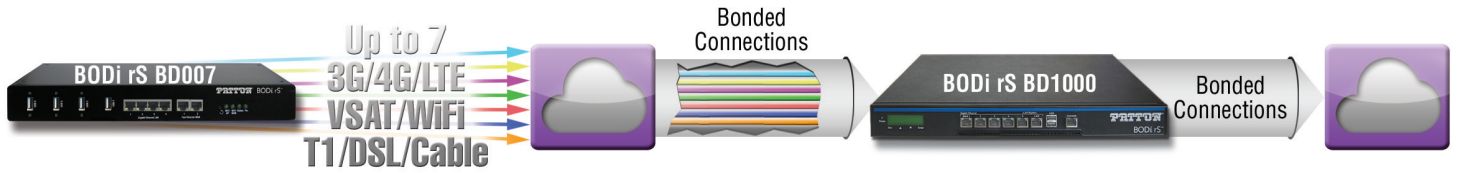


Bond up to 7 low cost Internet connections & save costs on expensive leased-line Internet connections



Multiple bonded wireless connections make BODi rS the ultimate mobile connectivity solution, allowing passengers to fully enjoy broadband-like speeds while on-the-go.



Bandwidth-on-Demand Load Balancing—Choose between 7 load balancing profiles for the optimum performance to fit your needs

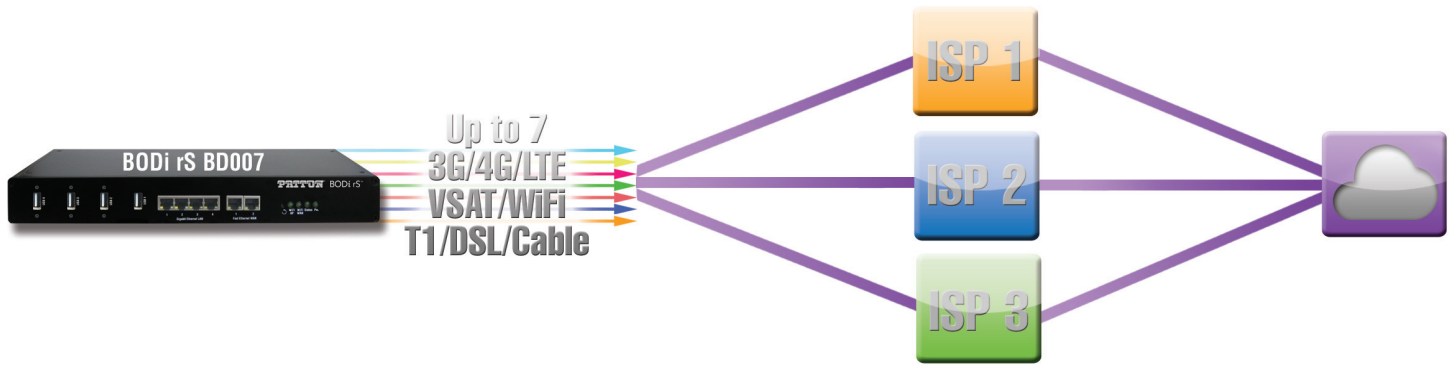

Patton's BODi rS ensures survivability and reliability of data connections. Guaranteeing uptime for managing and monitoring critical machinery and equipment.



Patton's BODi rS ensures survivability and reliability of data connections. Guaranteeing uptime for managing and monitoring business-critical network infrastructure, such as banks.



Solution Specifications*

WAN Interface

4 x USB • 2 x Gig Ethernet Ports • Dual 802.11b/g/n WiFi Modem • Support for PPPoE, Static IP, DHCP • WAN Link Health Check • Bandwidth Allowance Monitor

LAN Interface

4-Port Gig Ethernet Switch • Extended DHCP Options • DHCP Reservation • Support for Dynamic DNS services • DNS Proxy for LAN Clients

Antenna

4 x 5.5 dBi Magnetic Base • Omni Metal Antenna for WiFi

Complete VPN Solution

Site-to-Site VPN Bonding • Bandwidth Aggregation • Intelligent Failover • 256-bit AES Encryption • Pre-shared Key Authentication • Dynamic Routing PPTP VPN Server • RADIUS, LDAP Authentication • IPsec VPN (Network-to-Network)

Load Balancing

Intelligent Failover • Session Persistence Per-Service Load Distribution • Multiple Algorithms

Networking

NAT and IP Forwarding • Static Routes Port Forwarding • Many to One, One to

One NAT • NAT Pool • SIP ALG, H.323 ALG • UPnP, NAT-PMP • WINS Server

Advanced QoS

User Groups • Bandwidth Reservation Individual Bandwidth Limit • Custom Application QoS • Application Prioritization

Device Management

Web Administrative Interface • Email Notification • Active Client & Session Lists • Bandwidth Usage Statistics • Web Reporting Services • Syslog Service SNMP v1, v2c and v3 • 3.5 mm line out • RS-485/ RS-422

Operating Temperature

-40° to 65°C (-40° to 149°F)

Power

Internal Universal Power Supply • AC/DC adaptor for charging and operation

Dimensions

35.6L x 21.6W x 4.3H cm (14L x 8.5W x 1.7H inch)

Weight

1.8 kg (4 lbs)

Compliance

CE • FCC Part 15 Class A • NRTL Recognized

Ordering Info

BODi rS BD007: Rack Mountable, Bonding and Balancing Internet Router

BODi rS BD004: Mobile, Bonding and Balancing Internet Router

BODi rS BD100: Bonding and Balancing Network Hub

* Specifications subject to change without notice.



Patton Electronics Co.
7622 Rickenbacker Drive
Gaithersburg, Maryland
20879
USA

Phone +1 301 975 1000

Fax +1 301 869 9293

E-mail sales@patton.com

Web www.patton.com

07MBODI-RS-DS7

Patton is a registered trademark, and BODi rS and Let's Connect! are trademarks of Patton Electronics Company in the United States and other countries.

1800 817 807

sales@alloy.com.au
www.alloy.com.au

Proudly distributed in Australia and New Zealand by
Alloy Computer Products Pty Ltd

Melbourne

4/585 Blackburn Road, Notting Hill, VIC 3168
Tel: (03) 85629000 Fax: (03) 8562 9099

Sydney

Suite 204, Milsons Landing, 6A Glen Street,
Milsons Point, NSW, 2061
Tel: (02) 8080 9600 Fax: (03) 8562 9099